



LED

LED

LED

LED

LED

LED

LED

LED

ENGLISH:

OPTONICA is one of the most rapidly developing trademarks in the LED lighting industry worldwide. The renowned brand is a mixture of energy saving quality, yet providing excellent level of bright light, by means of wider key market access in Europe, Panama, Dubai and flexible trading mutually beneficial practices, focused entirely on the needs of our established partners in Europe, Asia, the Far and Middle East, and Africa.

OPTONICA's vision is that we are all responsible for energy saving in a world of scarce and drastically increasing resource prices and that we should leave our children a cleaner, healthier and brighter planet. Irrespective of whether you need to furnish your household, carry out an infrastructure project, construction or industrial requirements, hotels, commercial centers, shopping malls or offices, our portfolio offers a full product range

In spite of the fact that the night is somehow charming, we offer you to become a part of brighter LED future.

GERMAN:

OPTONICA ist eine der sich am schnellsten entwickelnden Marken im Bereich der LED Beleuchtung weltweit. Der renommierte Brand ist eine Synergie von hoher Qualität, kompromisslose Lichtausgabe und optimales Energieersparnis. Durch die internationale Präsenz in Schlüsselmärkte in Europa, Panama und Dubai werden flexible und komplexe Dienstleistungen angeboten, die ganz an den Ansprüchen unserer Kunden und Partner in Europa, Asien, der Nahe und Mittlere Osten und Afrika gerichtet sind.

Unser Motto ist, dass wir in gewissen Maßen die Verantwortung tragen in dieser Welt von teuren Ressourcen den Energieverbrauch zu senken, damit wir unseren Kindern eine saubere und besser leuchtende Erde hinterlassen können. Wir bieten eine vielfältige Produktpalette mit breiten Anwendungsmöglichkeiten in Wohnungen, Büros, Geschäften, Hotels, Gewerbe- und Industrieflächen.

Obwohl die Nacht sehr charmant sein kann, werden Sie ein Teil einer helleren LED Zukunft!

RUSSIAN:

ОПТОНИКА является наиболее быстро утверждающихся развивающимся брендом в области светодиодного освещения в мировом масштабе. Реномированный бренд является симбиозом качества, позволяющим достичь высокие коэффициенты энергосбережения без компромиссов со светоотдачей, а также яркого международного присутствия на ключевых рынках в Европе, Панаме и Дубае посредством взаимовыгодных торговых практик, полностью сосредоточенных на потребностях наших клиентов и партнеров в Европе, Азии, на Ближнем и Среднем Востоке и Африке.

Кредо компании ОПТОНИКА заключается в том, что все мы в значительной степени ответственны за снижение потребления энергии в мире все более уменьшающихся и дорогостоящих ресурсов, чтобы оставить нашим детям чистую и наилучшим образом освещенную планету. Независимо от того, идет ли речь о домашних хозяйствах, инфраструктурных проектах, жилых и промышленных потребностях, отелях, торговых центрах или офисах, наше портфолио предлагает богатый и полный ассортимент продукции.

Несмотря на то, что ночь обладает своим очарованием, мы предлагаем вам стать частью более яркого СВЕТОДИОДНОГО будущего.

GREEK:

Η OPTONICA είναι μία από τις ταχύτερα αναπτυσσόμενες μάρκες στον τομέα του φωτισμού με διάδους εκπομπής φωτός σε όλο τον κόσμο. Η διάσημη μάρκα αποτελεί συνδυασμός ποιότητας που επιτρέπει υψηλές τιμές εξοικονόμησης ενέργειας, χωρίς να διακυβεύεται η απόδοση φωτός, και έχει φωτεινή διεθνή παρουσία σε σημαντικές αγορές στην Ευρώπη, τον Παναμά και το Ντουμπάι μέσω ευέλικτων, αμοιβαία επωφελών εμπορικών πρακτικών, που επικεντρώνονται αποκλειστικά στις ανάγκες των πελατών και των συνεργατών μας από την Ευρώπη, την Ασία, από την Εγγύ και Μέση Ανατολή και την Αφρική.

Το πιστεύω της OPTONICA είναι ότι όλοι μας είμαστε σε μεγάλο βαθμό υπεύθυνοι για τη μείωση της κατανάλωσης ενέργειας σε έναν κόσμο των όλο και πιο σπάνιων και ακριβών πόρων, για να αφήσουμε στα παιδιά μας έναν καθαρό και καλά φωτισμένο πλανήτη. Ανεξάρτητα από το εάν προκειται για νοικοκυριά, έργα υποδομής, για ανάγκες κτιρίων και για βιομηχανικές χρήσεις, για ξενοδοχεία, εμπορικά κέντρα ή γραφεία, το χαρτοφυλάκιό μας προσφέρει μια ευρεία και πλήρη γκάμα προϊόντων.

Αν και η νύχτα έχει τη γοητεία του, σας προτείνουμε να γίνετε μέρος ενός φωτεινότερου μέλλοντος των ΔΙΟΔΩΝ ΕΚΠΟΜΠΗΣ ΦΩΤΟΣ.




HUNGARIAN:

Az OPTONICA a LED világítás területén világ viszonylatban az egyik leggyorsabban fejlődő vállalkozás.

Az OPTONICA legfőbb elve szerint mindenki nagymértékben felelős azért, hogy csökkenjen az energia felhasználás egy olyan világban, amelyben egyre kevesebb és drága erőforrás van, valamint gyermekeinknek egy tisztább bolygót hagyjunk örökül. Függetlenül attól, hogy háztartásokról vagy ipari, kereskedelmi szükségletekről van szó, olyan széles termék kínálatunkkal rendelkezünk, amely minden igényt kielégít.

Annak ellenére, hogy az éjszakának bizonyos varázsa van, ajánljuk, lépjenek be egy ragyogó VILÁGÍTÓ DIÓDÁS jövőbe.

Contents

	LED Spotlights and Bulbs	2-31
	LED Filament Bulbs	32-37 
	LED Tubes	38-43
	LED Downlights Outer instalation.....	44-47 
	LED Panels	48-53
	LED Downlights COB.....	54-63 
	LED Strips , Power supplies & Accesories	64-83
	LED Track Lights.....	84-87 
	LED Floodlights	88-101
	LED Industrial Lights	102-103 
	LED Street Lights & Lamps	104-107
	LED Wall Washers	108-109 
	LED Outdoor Lights	110-111




Model No.	SP1616	SP1617
P Watts	1.5W	1.5W
V Input Voltage	AC,DC: 12V	AC,DC: 12V
F Flux	120 lm	120 lm
B Beam Angle	270°	270°
L Light Color	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80
I IP Rating	IP20	IP20
L Life Span	25 000 h	25 000 h
L Dimension	φ10x30 mm	φ10x30 mm

EAN Code 4500K [3800156616165](#)
EAN Code 2700K [3800156616172](#)

1.5W LED BULB G4

SP1616 Neutral Light [4500K](#)
SP1617 Warm Light [2700K](#)

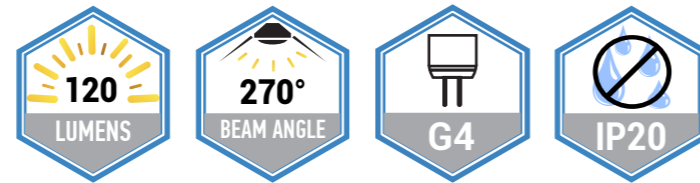



Model No.	SP1601
P Watts	1W
V Input Voltage	AC,DC: 12V
F Flux	90 lm
B Beam Angle	150°
L Light Color	WARM LIGHT
Ra CRI	>80
I IP Rating	IP20
L Life Span	25 000 h
L Dimension	φ10x30 mm

EAN Code 2700K [3800156616011](#)



1W LED BULB G4

SP1601 Warm Light [2700K](#)

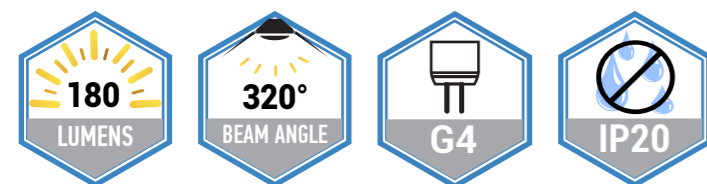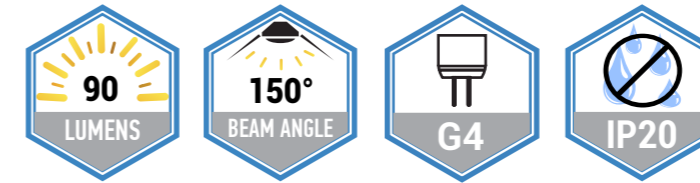

2 PCS
BLISTER
PACK



2W LED BULB G4


Model No.	SP1623	SP1624	SP1625
P Watts	2W	2W	2W
V Input Voltage	AC,DC: 12V	AC,DC: 12V	AC,DC: 12V
F Flux	180 lm	180 lm	180 lm
B Beam Angle	320°	320°	320°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ10x35 mm	φ10x35 mm	φ10x35 mm

EAN Code 6000K [3800156616233](#)
EAN Code 4500K [3800156616240](#)
EAN Code 2700K [3800156616257](#)



SP1623 White Light [6000K](#)
SP1624 Neutral Light [4500K](#)
SP1625 Warm Light [2700K](#)

1.5W LED BULB G4

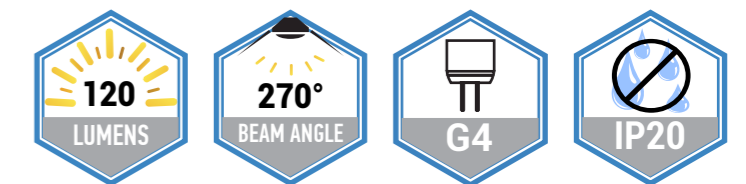

SP1428 Warm Light [2700K](#)

Model No.	SP1428
P Watts	1.5W
V Input Voltage	AC,DC: 12V
F Flux	120 lm
B Beam Angle	270°
L Light Color	WARM LIGHT
Ra CRI	>80
I IP Rating	IP20
L Life Span	25 000 h
L Dimension	φ10x30 mm

EAN Code 2700K [3800156614284](#)




Model No.	SP1603	SP1604
Watts	2.4W	2.4W
Input Voltage	AC,DC: 12V	AC,DC: 12V
Flux	180 lm	180 lm
Beam Angle	320°	320°
Light Color	WARM LIGHT	WHITE LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ30x10 mm	φ30x10 mm

2.4W
LED BULB G4

2 PCS
BLISTER
PACK



EAN Code 4500K **3800156616035**
EAN Code 2700K **3800156616042**

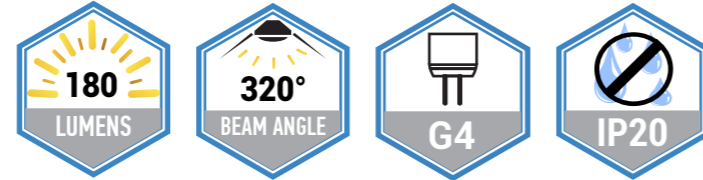


SP1604 White Light **6000K**
SP1603 Warm Light **2700K**

Model No.	SP1065
Watts	4W
Input Voltage	AC,DC: 12V
Flux	320 lm
Beam Angle	36°
Light Color	WARM LIGHT
CRI	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ35x40 mm




4W
LED BULB MR16 G4

EAN Code 2700K **3800156610651**

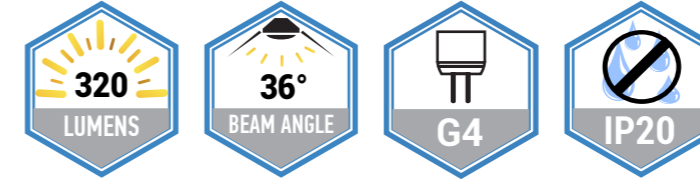

SP1065 Warm Light **2700K**

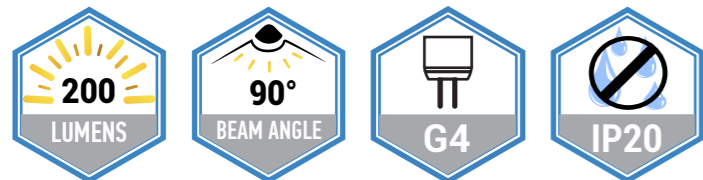

2.5W
LED BULB G4

Model No.	SP1614
Watts	2W
Input Voltage	AC,DC: 12V
Flux	200 lm
Beam Angle	90°
Light Color	WARM LIGHT
CRI	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ20x48 mm



EAN Code 2700K **3800156616141**

SP1614 Warm Light **2700K**






2W SMD
LED BULB G9

5 PCS
BLISTER
PACK



Model No.	SP1631	SP1632
Watts	2W	2W
Input Voltage	AC: 220V	AC: 220V
Flux	160 lm	160 lm
Beam Angle	320°	320°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ16x50 mm	φ16x50 mm

EAN Code 6000K [3800156616318](#)
EAN Code 2700K [3800156616325](#)

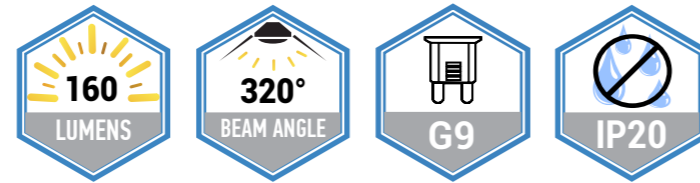


SP1631 White Light 6000K
SP1632 Warm Light 2700K




3W SMD
LED BULB G9

Model No.	SP1626	SP1627
Watts	3W	3W
Input Voltage	AC: 220V	AC: 220V
Flux	270 lm	270 lm
Beam Angle	320°	320°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ16x50 mm	φ16x50 mm

EAN Code 6000K [3800156616264](#)
EAN Code 2700K [3800156616271](#)

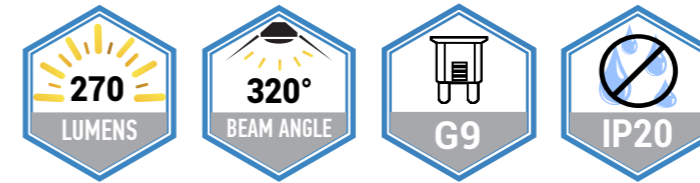

SP1626 White Light 6000K
SP1627 Warm Light 2700K

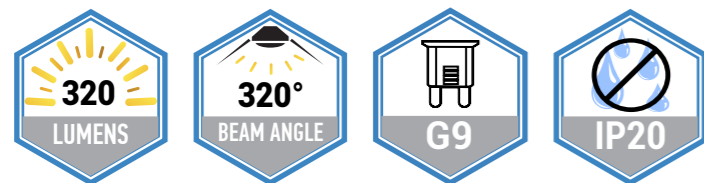

5 PCS
BLISTER
PACK



4W SMD
LED BULB G9

Model No.	SP1633	SP1634
Watts	4W	4W
Input Voltage	AC: 220V	AC: 220V
Flux	320 lm	320 lm
Beam Angle	320°	320°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ16x50 mm	φ16x50 mm

EAN Code 6000K [3800156616332](#)
EAN Code 2700K [3800156616349](#)




SP1633 White Light 6000K
SP1634 Warm Light 2700K

4.5W SMD
LED BULB G9



2 PCS
BLISTER
PACK

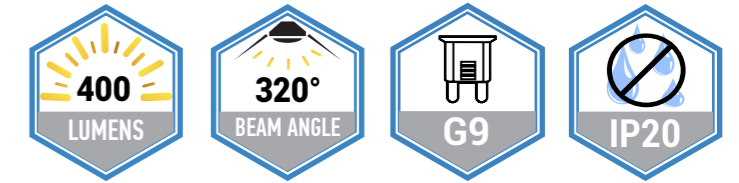

SP1635 White Light 6000K
SP1636 Neutral Light 4500K
SP1637 Warm Light 2700K

Model No.	SP1635	SP1636	SP1637
Watts	4.5W	4.5W	4.5W
Input Voltage	AC:220V	AC:220V	AC:220V
Flux	400 lm	400 lm	400 lm
Beam Angle	320°	320°	320°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ15x60mm	φ15x60mm	φ15x60mm

EAN Code 6000K [3800156616356](#)
EAN Code 4500K [3800156616363](#)
EAN Code 2700K [3800156616370](#)



OSRAM CHIP

Model No.	SP1520	SP1521	SP1522
P Watts	30W	30W	30W
V Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
F Flux	2400 lm	2400 lm	2400 lm
B Beam Angle	24°	24°	24°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ94x123 mm	φ94x123 mm	φ94x123 mm



EAN Code 6000K [3800156615205](#)
 EAN Code 4500K [3800156615212](#)
 EAN Code 2700K [3800156615229](#)

30W

LED BULB PAR30

SP1520 White Light [6000K](#)
 SP1521 Neutral Light [4500K](#)
 SP1522 Warm Light [2700K](#)



12W

LED BULB AR111

Model No.	SP1523	SP1524	SP1525
P Watts	12W	12W	12W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
F Flux	960 lm	960 lm	960 lm
B Beam Angle	36°	36°	36°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ111x70 mm	φ111x70 mm	φ111x70 mm



SP1523 White Light [6000K](#)
 SP1524 Neutral Light [4500K](#)
 SP1525 Warm Light [2700K](#)

EAN Code 6000K [3800156615236](#)
 EAN Code 4500K [3800156615243](#)
 EAN Code 2700K [3800156615250](#)

Model No.	SP1516	SP1517
P Watts	15W	15W
V Input Voltage	AC,DC: 12V	AC,DC: 12V
F Flux	1200 lm	1200 lm
B Beam Angle	30°	30°
L Light Color	WARM LIGHT	NEUTRAL LIGHT
Ra CRI	>80	>80
I IP Rating	IP20	IP20
L Life Span	25 000 h	25 000 h
L Dimension	φ111x60 mm	φ111x60 mm



EAN Code 4500K [3800156615168](#)
 EAN Code 2700K [3800156615175](#)




EPISTAR CHIP

15W

LED BULB AR111

SP1517 Neutral Light [4500K](#)
 SP1516 Warm Light [2700K](#)




15W

LED BULB AR111



EPISTAR CHIP



Model No.	SP1518	SP1519
P Watts	15W	15W
V Input Voltage	AC,DC: 12V	AC,DC: 12V
F Flux	1200 lm	1200 lm
B Beam Angle	120°	120°
L Light Color	WARM LIGHT	NEUTRAL LIGHT
Ra CRI	>80	>80
I IP Rating	IP20	IP20
L Life Span	25 000 h	25 000 h
L Dimension	φ111x60 mm	φ111x60 mm



SP1519 Neutral Light [4500K](#)
 SP1518 Warm Light [2700K](#)

EAN Code 4500K [3800156615182](#)
 EAN Code 2700K [3800156615199](#)


LED SPOTLIGHTS AND BULBS

Model No.	SP1163	SP1167	SP1164
P Watts	4W	4W	4W
V Input Voltage	AC,DC:12V	AC,DC:12V	AC,DC:12V
Flux	320 lm	320 lm	320 lm
Beam Angle	50°	50°	50°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ50x55 mm	φ50x55mm	φ50x55mm

EAN Code 6000K [3800156611634](#)
 EAN Code 4500K [3800156611672](#)
 EAN Code 2700K [3800156611641](#)




4W COB LED SPOTLIGHT MR16,GU5.3

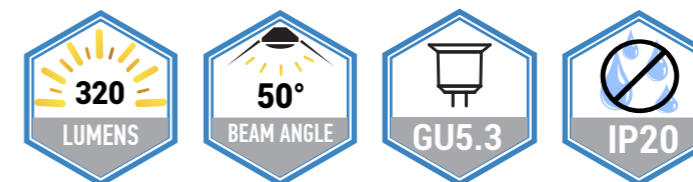

SP1163 White Light [6000K](#)
 SP1167 Neutral Light [4500K](#)
 SP1164 Warm Light [2700K](#)

6W COB LED SPOTLIGHT MR16,GU5.3

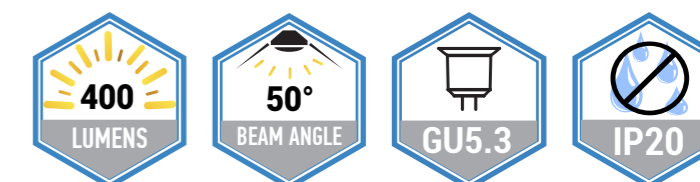

Model No.	SP1168	SP1169	SP1170
P Watts	6W	6W	6W
V Input Voltage	AC,DC:12V	AC,DC:12V	AC,DC:12V
Flux	400 lm	400 lm	400 lm
Beam Angle	50°	50°	50°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ50x55mm	φ50x55mm	φ50x55mm

SP1168 White Light [6000K](#)
 SP1169 Neutral Light [4500K](#)
 SP1170 Warm Light [2700K](#)

EAN Code 6000K [3800156611689](#)
 EAN Code 4500K [3800156611696](#)
 EAN Code 2700K [3800156611702](#)



3W SMD LED SPOTLIGHT MR16, GU5.3

Model No.	SP1181	SP1182	SP1183
P Watts	3W	3W	3W
V Input Voltage	AC,DC:12V	AC,DC:12V	AC,DC:12V
F Flux	240 lm	240 lm	240 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x50 mm	φ50x50mm	φ50x50mm

EAN Code 6000K [3800156611818](#)
 EAN Code 4500K [3800156611825](#)
 EAN Code 2700K [3800156611832](#)

SP1181 White Light [6000K](#)
 SP1182 Neutral Light [4500K](#)
 SP1183 Warm Light [2700K](#)



4W SMD LED SPOTLIGHT MR16, GU5.3

Model No.	SP1184	SP1185	SP1186
P Watts	4W	4W	4W
V Input Voltage	AC,DC: 12V	AC,DC: 12V	AC,DC: 12V
F Flux	320 lm	320 lm	320 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x50 mm	φ50x50 mm	φ50x50 mm

EAN Code 6000K [3800156611849](#)
 EAN Code 4500K [3800156611856](#)
 EAN Code 2700K [3800156611863](#)

SP1184 White Light [6000K](#)
 SP1185 Neutral Light [4500K](#)
 SP1186 Warm Light [2700K](#)




Model No.	SP1191	SP1192	SP1193
P Watts	5W	5W	5W
V Input Voltage	DC:12V	DC:12V	DC:12V
F Flux	400 lm	400 lm	400 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x45 mm	φ50x45mm	φ50x45mm

EAN Code 6000K [3800156611917](#)
 EAN Code 4500K [3800156611924](#)
 EAN Code 2700K [3800156611931](#)



5W SMD LED SPOTLIGHT MR16, GU5.3

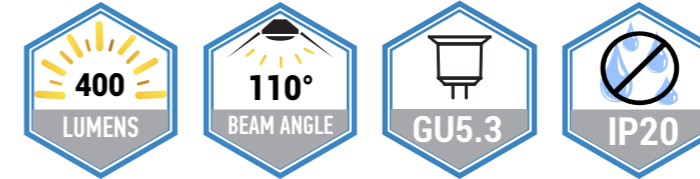

SP1191 White Light [6000K](#)
 SP1192 Neutral Light [4500K](#)
 SP1193 Warm Light [2700K](#)

7W SMD LED SPOTLIGHT MR16, GU5.3



Model No.	SP1194	SP1195	SP1196
P Watts	7W	7W	7W
V Input Voltage	DC:12V	DC:12V	DC:12V
F Flux	560 lm	560 lm	560 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x45mm	φ50x45mm	φ50x45mm

SP1194 White Light [6000K](#)
 SP1195 Neutral Light [4500K](#)
 SP1196 Warm Light [2700K](#)

EAN Code 6000K [3800156611948](#)
 EAN Code 4500K [3800156611955](#)
 EAN Code 2700K [3800156611962](#)





Model No.	SP1263	SP1264	SP1265
P Watts	4W	4W	4W
V Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
F Flux	320 lm	320 lm	320 lm
B Beam Angle	50°	50°	50°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x60 mm	φ50x60mm	φ50x60mm

EAN Code 6000K [3800156612631](#)
 EAN Code 4500K [3800156612648](#)
 EAN Code 2700K [3800156612655](#)

4W COB LED SPOTLIGHT GU10

SP1263 White Light [6000K](#)
 SP1264 Neutral Light [4500K](#)
 SP1265 Warm Light [2700K](#)





Model No.	SP1269	SP1270	SP1271
P Watts	6W	6W	6W
V Input Voltage	AC: 220-240V	AC: 220-240V	AC: 220-240V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	50°	50°	50°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x60 mm	φ50x60mm	φ50x60mm

EAN Code 6000K [3800156612693](#)
 EAN Code 4500K [3800156612709](#)
 EAN Code 2700K [3800156612716](#)

6W COB LED SPOTLIGHT MR16

SP1269 White Light [6000K](#)
 SP1270 Neutral Light [4500K](#)
 SP1271 Warm Light [2700K](#)

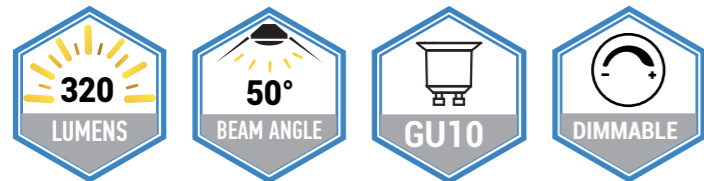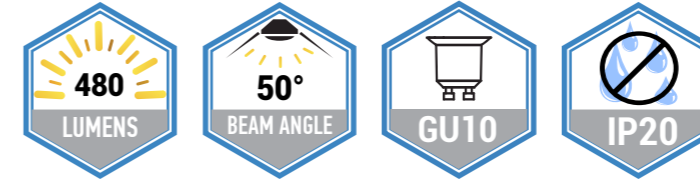

4W COB Dimmable LED SPOTLIGHT GU10

Model No.	SP1266	SP1267	SP1268
P Watts	4W	4W	4W
V Input Voltage	AC: 220-240V	AC: 220-240V	AC: 220-240V
F Flux	320 lm	320 lm	320 lm
B Beam Angle	50°	50°	50°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x60 mm	φ50x60 mm	φ50x60 mm

EAN Code 6000K [3800156612662](#)
 EAN Code 4500K [3800156612679](#)
 EAN Code 2700K [3800156612686](#)



SP1266 White Light [6000K](#)
 SP1267 Neutral Light [4500K](#)
 SP1268 Warm Light [2700K](#)

6W COB Dimmable LED SPOTLIGHT GU10



Model No.	SP1272	SP1273	SP1274
P Watts	6W	6W	6W
V Input Voltage	AC: 220-240V	AC: 220-240V	AC: 220-240V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	50°	50°	50°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x60mm	φ50x60mm	φ50x60mm



SP1272 White Light [6000K](#)
 SP1273 Neutral Light [4500K](#)
 SP1274 Warm Light [2700K](#)

EAN Code 6000K [3800156612723](#)
 EAN Code 4500K [3800156612730](#)
 EAN Code 2700K [3800156612747](#)



3W SMD LED SPOTLIGHT GU10

Model No.	SP1281	SP1282	SP1283
P Watts	3W	3W	3W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
F Flux	240 lm	240 lm	240 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x50 mm	φ50x50mm	φ50x50mm

EAN Code 6000K [3800156612815](#)
 EAN Code 4500K [3800156612822](#)
 EAN Code 2700K [3800156612839](#)

SP1281 White Light [6000K](#)
 SP1282 Neutral Light [4500K](#)
 SP1283 Warm Light [2700K](#)





5W SMD LED SPOTLIGHT MR16

Model No.	SP1287	SP1288	SP1289
P Watts	5W	5W	5W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
F Flux	400 lm	400 lm	400 lm
B Beam Angle	36°	36°	36°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x50 mm	φ50x50mm	φ50x50mm

EAN Code 6000K [3800156612877](#)
 EAN Code 4500K [3800156612884](#)
 EAN Code 2700K [3800156612891](#)

SP1287 White Light [6000K](#)
 SP1288 Neutral Light [4500K](#)
 SP1289 Warm Light [2700K](#)

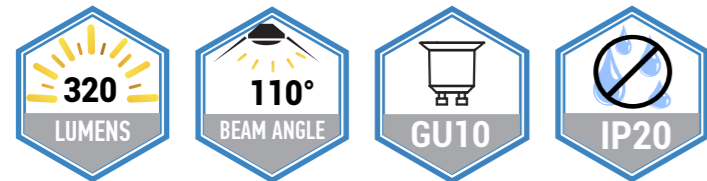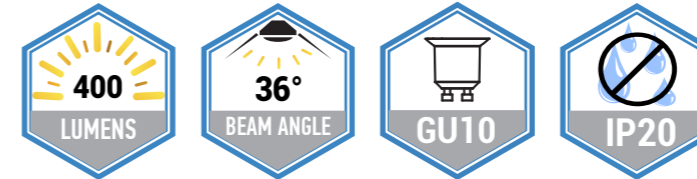

4W SMD LED SPOTLIGHT GU10


Model No.	SP1284	SP1285	SP1286
P Watts	4W	4W	4W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
F Flux	320 lm	320 lm	320 lm
B Beam Angle	110°	110°	110°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x50 mm	φ50x50 mm	φ50x50 mm

EAN Code 6000K [3800156612846](#)
 EAN Code 4500K [3800156612853](#)
 EAN Code 2700K [3800156612860](#)



SP1284 White Light [6000K](#)
 SP1285 Neutral Light [4500K](#)
 SP1286 Warm Light [2700K](#)

5W SMD LED SPOTLIGHT GU10

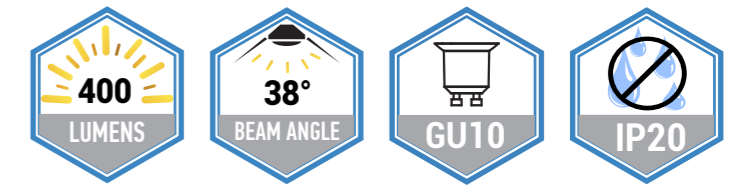

Model No.	SP1935	SP1936	SP1937
P Watts	5W	5W	5W
V Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
F Flux	400 lm	400 lm	400 lm
B Beam Angle	38°	38°	38°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ50x55mm	φ50x55mm	φ50x55mm


SP1935 White Light [6000K](#)
 SP1936 Neutral Light [4500K](#)
 SP1937 Warm Light [2700K](#)

EAN Code 6000K [3800156619357](#)
 EAN Code 4500K [3800156619364](#)
 EAN Code 2700K [3800156619371](#)



Model No.	SP1291	SP1292	SP1293
P Watts	6W	6W	6W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ50x52mm	φ50x52mm	φ50x52mm

EAN Code 6000K [3800156612914](#)
 EAN Code 4500K [3800156612921](#)
 EAN Code 2700K [3800156612938](#)

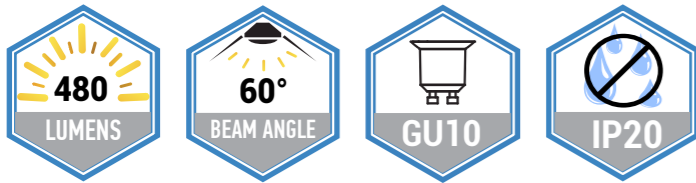

6W SMD
LED SPOTLIGHT
GU10

SP1291 White Light [6000K](#)
 SP1292 Neutral Light [4500K](#)
 SP1293 Warm Light [2700K](#)


Model No.	SP1294	SP1295	SP1296
P Watts	7W	7W	7W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
F Flux	560 lm	560 lm	560 lm
B Beam Angle	38°	38°	38°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ50x52 mm	φ50x52 mm	φ50x52 mm

EAN Code 6000K [3800156612945](#)
 EAN Code 4500K [3800156612952](#)
 EAN Code 2700K [3800156612969](#)



7W SMD
LED SPOTLIGHT
GU10

SP1294 White Light [6000K](#)
 SP1295 Neutral Light [4500K](#)
 SP1296 Warm Light [2700K](#)

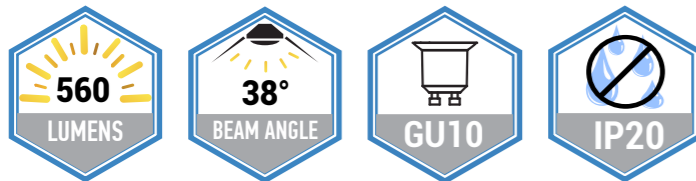

7W SMD
LED SPOTLIGHT
GU10

Model No.	SP1938	SP1939	SP1940
P Watts	7W	7W	7W
V Input Voltage	AC: 175-265V	AC: 175-265V	AC: 175-265V
F Flux	560 lm	560 lm	560 lm
B Beam Angle	38°	38°	38°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ50x55mm	φ50x55mm	φ50x55mm

EAN Code 6000K [3800156619388](#)
 EAN Code 4500K [3800156619395](#)
 EAN Code 2700K [3800156619401](#)



SP1938 White Light [6000K](#)
 SP1939 Neutral Light [4500K](#)
 SP1940 Warm Light [2700K](#)

7W SMD Dimmable
LED SPOTLIGHT
GU10



SP1297 White Light [6000K](#)
 SP1298 Neutral Light [4500K](#)
 SP1299 Warm Light [2700K](#)

Model No.	SP1297	SP1298	SP1299
P Watts	7W	7W	7W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
F Flux	560 lm	560 lm	560 lm
B Beam Angle	38°	38°	38°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ50x54mm	φ50x54mm	φ50x54mm

EAN Code 6000K [3800156612976](#)
 EAN Code 4500K [3800156612983](#)
 EAN Code 2700K [3800156612990](#)




- Holder GU10
- Input Voltage AC:175-240V
- Material Aluminum

GU10 FITTING
FOR LED SPOTLIGHT




- OT5060
WHITE SHELL
- OT5061
CHROME SHELL
- OT5062
SATIN CHROME SHELL


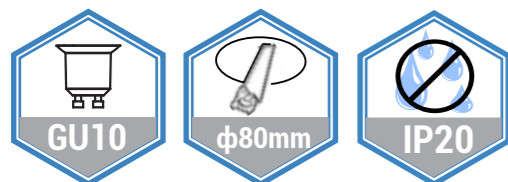


- Holder GU10
- Input Voltage AC:175-240V
- Material Aluminum

GU10 FITTING
FOR LED SPOTLIGHT



- OT5066
WHITE SHELL
- OT5067
CHROME SHELL
- OT5068
SATIN CHROME SHELL

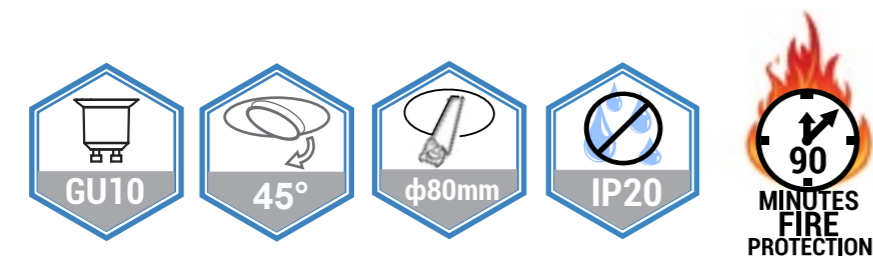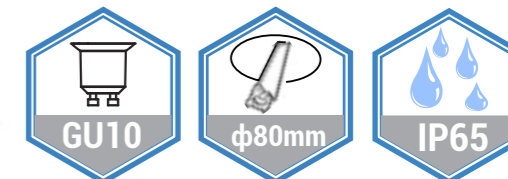

- Holder GU10
- Input Voltage AC:175-240V
- Material Aluminum

GU10 FITTING
FOR LED SPOTLIGHT



- OT5063
WHITE SHELL
- OT5064
CHROME SHELL
- OT5065
SATIN CHROME SHELL



ACCESSORIES



OT5170
Dimension $\phi 83 \times 29$ mm



OT5172
Dimension $\phi 83 \times 29$ mm



OT5171
Dimension $\phi 83 \times 29$ mm






4W G45 LED BULB E27

Model No.	SP1838	SP1839	SP1840
P Watts	4W	4W	4W
V Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	320 lm	320 lm	320 lm
Beam Angle	180°	180°	180°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ45x75 mm	φ45x75mm	φ45x75mm

EAN Code 6000K [3800156618381](#)
 EAN Code 4500K [3800156618398](#)
 EAN Code 2700K [3800156618404](#)

SP1838 White Light [6000K](#)
 SP1839 Neutral Light [4500K](#)
 SP1840 Warm Light [2700K](#)


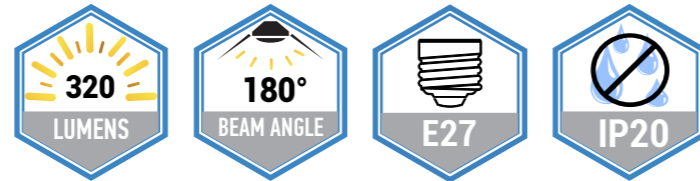


7W A60 LED BULB E27

Model No.	SP1824	SP1825	SP1826
P Watts	7W	7W	7W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	560 lm	560 lm	560 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x115 mm	φ60x115mm	φ60x115mm

EAN Code 6000K [3800156618244](#)
 EAN Code 4500K [3800156618251](#)
 EAN Code 2700K [3800156618268](#)

SP1824 White Light [6000K](#)
 SP1825 Neutral Light [4500K](#)
 SP1826 Warm Light [2700K](#)

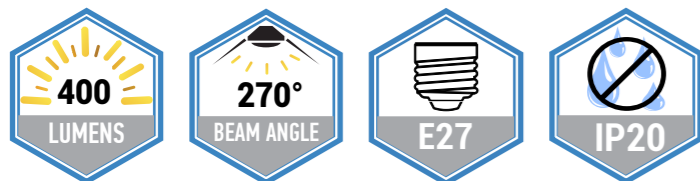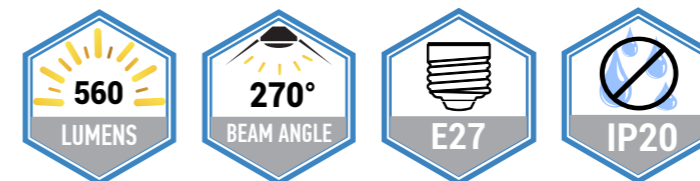

5W A60 LED BULB E27


Model No.	SP1821	SP1822	SP1823
P Watts	5W	5W	5W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	400 lm	400 lm	400 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x115 mm	φ60x115 mm	φ60x115 mm

EAN Code 6000K [3800156618213](#)
 EAN Code 4500K [3800156618220](#)
 EAN Code 2700K [3800156618237](#)

SP1821 White Light [6000K](#)
 SP1822 Neutral Light [4500K](#)
 SP1823 Warm Light [2700K](#)



10W A60 LED BULB E27

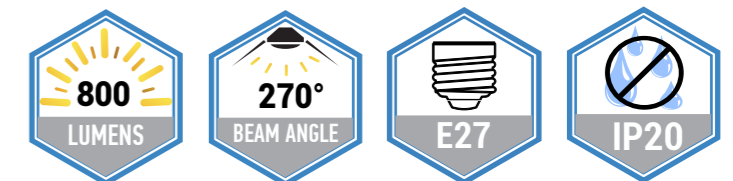

Model No.	SP1827	SP1828	SP1829
P Watts	10W	10W	10W
V Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	800 lm	800 lm	800 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x118mm	φ60x118mm	φ60x118mm

SP1827 White Light [6000K](#)
 SP1828 Neutral Light [4500K](#)
 SP1829 Warm Light [2700K](#)

EAN Code 6000K [3800156618275](#)
 EAN Code 4500K [3800156618282](#)
 EAN Code 2700K [3800156618299](#)





DIMMABLE


10W A60 Dimmable

LED BULB
E27

SP1849 White Light 6000K
SP1850 Neutral Light 4500K
SP1830 Warm Light 2700K

Model No.	SP1849	SP1850	SP1830
Watts	10W	10W	10W
Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	800 lm	800 lm	800 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x120 mm	φ60x120mm	φ60x120mm

EAN Code 6000K 3800156618497
EAN Code 4500K 3800156618503
EAN Code 2700K 3800156618305

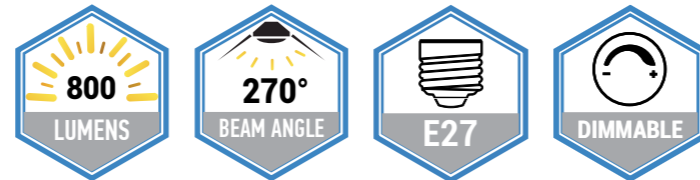

DIMMABLE



12W A60 Dimmable

LED BULB
E27

SP1851 White Light 6000K
SP1852 Neutral Light 4500K
SP1834 Warm Light 2700K

Model No.	SP1851	SP1852	SP1834
Watts	12W	12W	12W
Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	1000 lm	1000 lm	1000 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x120 mm	φ60x120mm	φ60x120mm

EAN Code 6000K 3800156618510
EAN Code 4500K 3800156618527
EAN Code 2700K 3800156618343

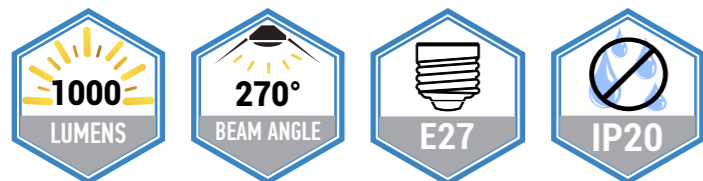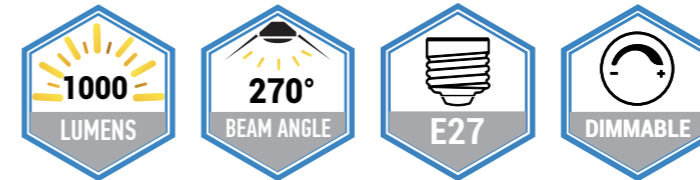

12W A60 LED BULB E27




Model No.	SP1831	SP1832	SP1833
Watts	12W	12W	12W
Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	1000 lm	1000 lm	1000 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x120 mm	φ60x120mm	φ60x120mm

EAN Code 6000K 3800156618312
EAN Code 4500K 3800156618329
EAN Code 2700K 3800156618336

SP1831 White Light 6000K
SP1832 Neutral Light 4500K
SP1833 Warm Light 2700K

15W A60 LED BULB E27

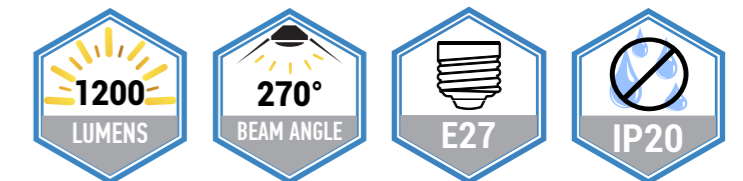

Model No.	SP1835	SP1836	SP1837
Watts	15W	15W	15W
Input Voltage	AC: 170-265V	AC: 170-265V	AC: 170-265V
Flux	1200 lm	1200 lm	1200 lm
Beam Angle	270°	270°	270°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ60x120 mm	φ60x120 mm	φ60x120 mm

SP1835 White Light 6000K
SP1836 Neutral Light 4500K
SP1837 Warm Light 2700K

EAN Code 6000K 3800156618350
EAN Code 4500K 3800156618367
EAN Code 2700K 3800156618374




Model No.	SP1841	SP1842	SP1843
P Watts	12W	12W	12W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
☀ Flux	1050 lm	1050 lm	1050 lm
◡ Beam Angle	270°	270°	270°
🌈 Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
💧 IP Rating	IP20	IP20	IP20
🕒 Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ95x138 mm	φ95x138 mm	φ95x138 mm

EAN Code 6000K [3800156618411](#)
 EAN Code 4500K [3800156618428](#)
 EAN Code 2700K [3800156618435](#)

12W G95

LED BULB
E27

SP1841 White Light [6000K](#)
 SP1842 Neutral Light [4500K](#)
 SP1843 Warm Light [2700K](#)

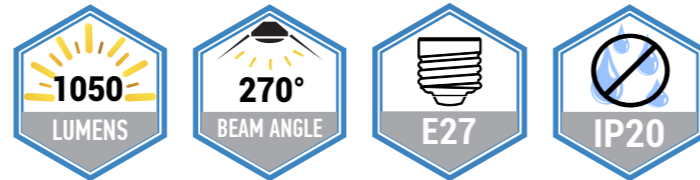

Model No.	SP1845	SP1846	SP1847
P Watts	15W	15W	15W
V Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
☀ Flux	1380 lm	1380 lm	1380 lm
◡ Beam Angle	270°	270°	270°
🌈 Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
💧 IP Rating	IP20	IP20	IP20
🕒 Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ120x155 mm	φ120x155 mm	φ120x155 mm



EAN Code 6000K [3800156618459](#)
 EAN Code 4500K [3800156618466](#)
 EAN Code 2700K [3800156618473](#)



15W G120

LED BULB
E27

SP1845 White Light [6000K](#)
 SP1846 Neutral Light [4500K](#)
 SP1847 Warm Light [2700K](#)

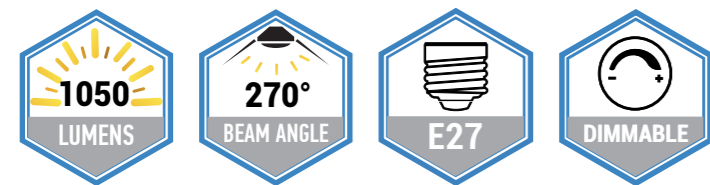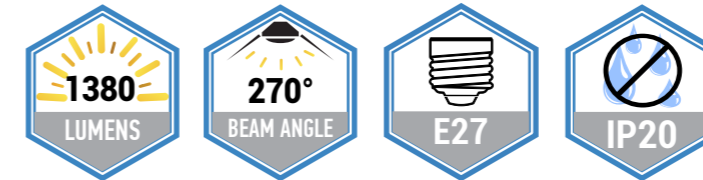

12W G95 Dimmable

LED BULB
E27

Model No.	SP1844
P Watts	12W
V Input Voltage	AC170-265V
☀ Flux	1050 lm
◡ Beam Angle	270°
🌈 Light Color	WARM LIGHT
Ra CRI	>80
💧 IP Rating	IP20
🕒 Life Span	25 000 h
L Dimension	φ95x138 mm



DIMMABLE




EAN Code 2700K [3800156618442](#)

SP1844 Warm Light [2700K](#)

15W G120 Dimmable

LED BULB G4
E27

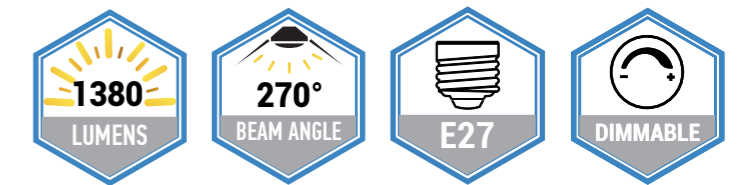

Model No.	SP1848
P Watts	15W
V Input Voltage	AC:170-265V
☀ Flux	1380 lm
◡ Beam Angle	270°
🌈 Light Color	WARM LIGHT
Ra CRI	>80
💧 IP Rating	IP20
🕒 Life Span	25 000 h
L Dimension	φ120x155 mm



DIMMABLE



SP1848 Warm Light [2700K](#)

EAN Code 2700K [3800156618480](#)




4W G45

LED BULB E14

Model No.	SP1451	SP1452	SP1453
Watts	4W	4W	4W
Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V
Flux	320 lm	320 lm	320 lm
Beam Angle	180°	180°	180°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ45x78 mm	φ48x78 mm	φ45x78 mm

EAN Code 6000K [3800156614512](#)
 EAN Code 4500K [3800156614529](#)
 EAN Code 2700K [3800156614536](#)

SP1451 White Light [6000K](#)
 SP1452 Neutral Light [4500K](#)
 SP1453 Warm Light [2700K](#)

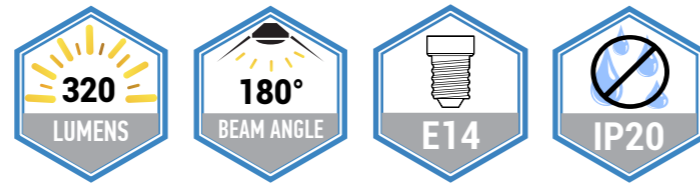



3W SMD

LED BULB E14

Model No.	SP1443	SP1444
Watts	3W	3W
Input Voltage	AC175-265V	AC175-265V
Flux	240 lm	240 lm
Beam Angle	360°	360°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ16x50 mm	φ16x50 mm

EAN Code 6000K [3800156614437](#)
 EAN Code 2700K [3800156614444](#)

SP1443 White Light [6000K](#)
 SP1444 Warm Light [2700K](#)

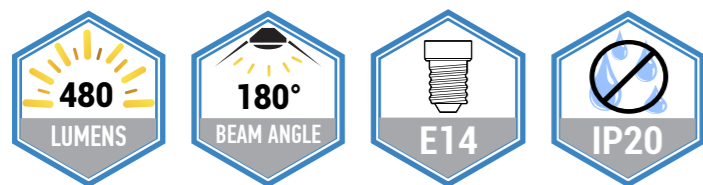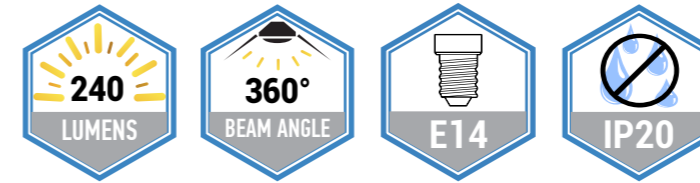

6W R50

LED BULB E14

Model No.	SP1438	SP1439	SP1440
Watts	6W	6W	6W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	480 lm	480 lm	480 lm
Beam Angle	180°	180°	180°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ50x90mm	φ50x90 mm	φ50x90 mm

EAN Code 6000K [3800156614383](#)
 EAN Code 4500K [3800156614390](#)
 EAN Code 2700K [3800156614406](#)




SP1438 White Light [6000K](#)
 SP1439 Neutral Light [4500K](#)
 SP1440 Warm Light [2700K](#)

5W SMD

LED BULB E14



SP1445 White Light [6000K](#)
 SP1446 Warm Light [2700K](#)

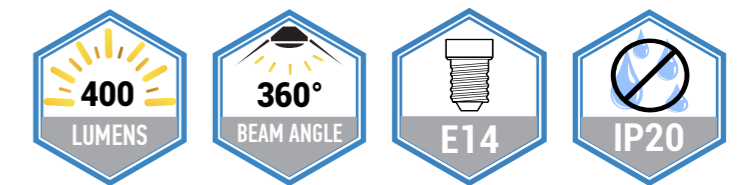

Model No.	SP1445	SP1446
Watts	5W	5W
Input Voltage	AC175-265V	AC175-265V
Flux	400 lm	400 lm
Beam Angle	360°	360°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ16x50 mm	φ16x50 mm

EAN Code 6000K [3800156614451](#)
 EAN Code 2700K [3800156614468](#)




6W CANDLE
LED BULB E14

Model No.	SP1466	SP1467	SP1468
P Watts	6W	6W	6W
V Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	180°	180°	180°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ37x125 mm	φ37x125 mm	φ37x125 mm

EAN Code 6000K [3800156614666](#)
 EAN Code 4500K [3800156614673](#)
 EAN Code 2700K [3800156614680](#)

SP1466 White Light 6000K
 SP1467 Neutral Light 4500K
 SP1468 Warm Light 2700K


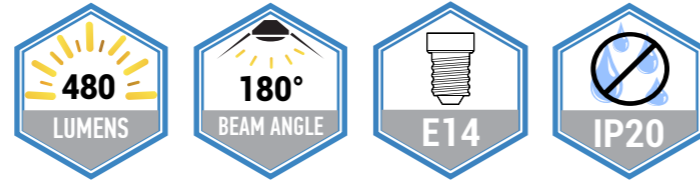


6W
LED BULB E14

Model No.	SP1460	SP1461	SP1462
P Watts	6W	6W	6W
V Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	180°	180°	180°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ37x100 mm	φ37x100 mm	φ37x100 mm

EAN Code 6000K [3800156614604](#)
 EAN Code 4500K [3800156614611](#)
 EAN Code 2700K [3800156614628](#)

SP1460 White Light 6000K
 SP1461 Neutral Light 4500K
 SP1462 Warm Light 2700K

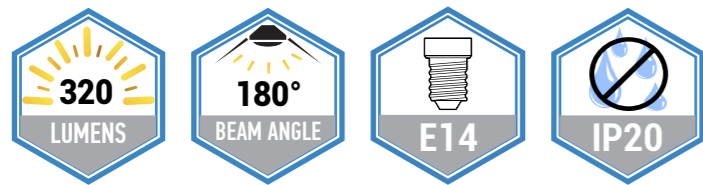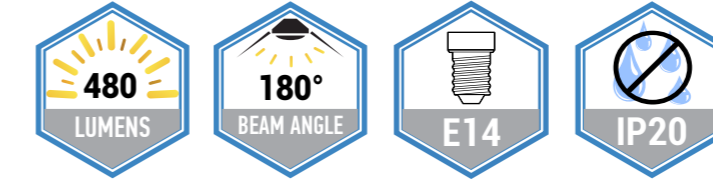

4W
LED BULB E14

Model No.	SP1457	SP1458	SP1459
P Watts	4W	4W	4W
V Input Voltage	AC85-265V	AC85-265V	AC85-265V
F Flux	320 lm	320 lm	320 lm
B Beam Angle	180°	180°	180°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ37x100 mm	φ37x100 mm	φ37x100 mm

EAN Code 6000K [3800156614574](#)
 EAN Code 4500K [3800156614581](#)
 EAN Code 2700K [3800156614598](#)



SP1457 White Light 6000K
 SP1458 Neutral Light 4500K
 SP1459 Warm Light 2700K


6W DIMMABLE
LED BULB E14



Model No.	SP1464	SP1465	SP1463
P Watts	6W	6W	6W
V Input Voltage	AC85-265V	AC85-265V	AC85-265V
F Flux	480 lm	480 lm	480 lm
B Beam Angle	180°	180°	180°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
L Dimension	φ37x100 mm	φ37x100 mm	φ37x100 mm

SP1464 White Light 6000K
 SP1465 Neutral Light 4500K
 SP1463 Warm Light 2700K

EAN Code 6000K [3800156614642](#)
 EAN Code 4500K [3800156614659](#)
 EAN Code 2700K [3800156614635](#)

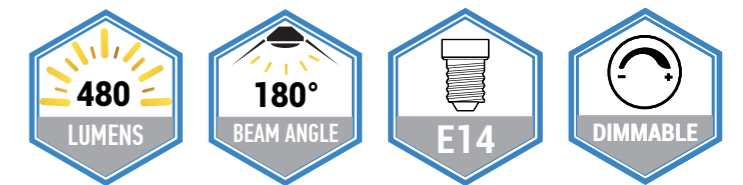

LED FILAMENT BULBS

GOLDEN GLASS



400 LUMENS



4W FILAMENT

LED BULB ST64 E27

SP1870 Warm Light 2700K

GOLDEN GLASS



810 LUMENS

6.5W FILAMENT

LED BULB ST64 E27

SP1871 Warm Light 2700K

5W FILAMENT

LED BULB R50 E27

SP1872 Warm Light 2700K



600 LUMENS



**4W FILAMENT
ST64 E27**

**6.5W FILAMENT
ST64 E27**

**5W FILAMENT
R50 E27**

Model No.	SP1870	SP1871	SP1872
Watts	4W	6.5W	5W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
Flux	400 lm	810 lm	600 lm
Beam Angle	300°	300°	70°
Light Color	WARM LIGHT	WARM LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ58x139 mm	φ58x139 mm	φ50x86 mm





200 LUMENS

2W FILAMENT

LED BULB G45 E27

- SP1864 White Light 6000K
- SP1865 Neutral Light 4500K
- SP1866 Warm Light 2700K



400 LUMENS

4W FILAMENT

LED BULB G125 E27

- SP1863 Neutral Light 4500K
- SP1862 Warm Light 2700K

400 LUMENS



4W FILAMENT

LED BULB G45 E27

- SP1867 White Light 6000K
- SP1868 Neutral Light 4500K
- SP1869 Warm Light 2700K

810 LUMENS



6.5W FILAMENT

LED BULB G125 E27

- SP1861 Neutral Light 4500K
- SP1860 Warm Light 2700K

	2W FILAMENT G45 E27	4W FILAMENT G45 E27	4W FILAMENT G125 E27	6.5W FILAMENT G125 E27
Model No.	SP1864/SP1865/SP1866	SP1867/SP1868/SP1869	SP1863/SP1862	SP1861/SP1860
Watts	2W	4W	4W	6.5W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	200 lm	400 lm	400 lm	810 lm
Beam Angle	300°	300°	300°	300°
Light Color	WH/NW/WW	WH/NW/WW	NW/WW	NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ45x78 mm	φ45x78 mm	φ125x165 mm	φ125x165 mm



400 LUMENS

4W FILAMENT

LED BULB A60 E27

- SP1857 White Light 6000K
- SP1858 Neutral Light 4500K
- SP1859 Warm Light 2700K



810 LUMENS

6.5W FILAMENT

LED BULB A60 E27

- SP1873 White Light 6000K
- SP1874 Neutral Light 4500K
- SP1875 Warm Light 2700K

600 LUMENS



5W FILAMENT

LED BULB A60 E27

- SP1854 White Light 6000K
- SP1855 Neutral Light 4500K
- SP1856 Warm Light 2700K

600 LUMENS



6W FILAMENT Dimmable

LED BULB A60 E27

- SP1853 Warm Light 2700K

	4W FILAMENT A60 E27	5W FILAMENT A60 E27	6.5W FILAMENT A60 E27	6W FILAMENT A60 E27
Model No.	SP1857/SP1858/SP1859	SP1854/SP1855/SP1856	SP1873/SP1874/SP1875	SP1853
Watts	4W	5W	6.5W	6W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	400 lm	600 lm	810 lm	600 lm
Beam Angle	300°	300°	300°	300°
Light Color	WH/NW/WW	WH/NW/WW	NW/WW	WARM LIGHT
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ60x106 mm	φ60x106 mm	φ60x106 mm	φ60x106 mm




2W FILAMENT
LED BULB G45 E14

Model No.	SP1474	SP1475	SP1476
P Watts	2W	2W	2W
V Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
F Flux	200 lm	200 lm	200 lm
B Beam Angle	300°	300°	300°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ45x78 mm	φ45x78 mm	φ45x78 mm

EAN Code 6000K [3800156614741](#)
 EAN Code 4500K [3800156614758](#)
 EAN Code 2700K [3800156614765](#)

SP1474 White Light [6000K](#)
 SP1475 Neutral Light [4500K](#)
 SP1476 Warm Light [2700K](#)


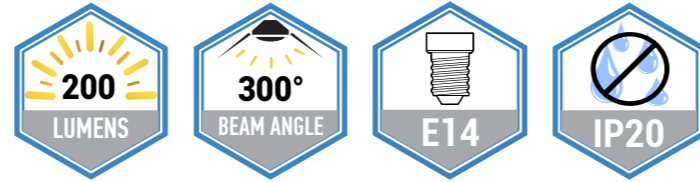


4W FILAMENT
LED BULB C35 E14

Model No.	SP1470	SP1471	SP1472
P Watts	4W	4W	4W
V Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
F Flux	400 lm	400 lm	400 lm
B Beam Angle	300°	300°	300°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ35x98 mm	φ35x98 mm	φ35x98 mm

EAN Code 6000K [3800156614703](#)
 EAN Code 4500K [3800156614710](#)
 EAN Code 2700K [3800156614727](#)

SP1470 White Light [6000K](#)
 SP1471 Neutral Light [4500K](#)
 SP1472 Warm Light [2700K](#)

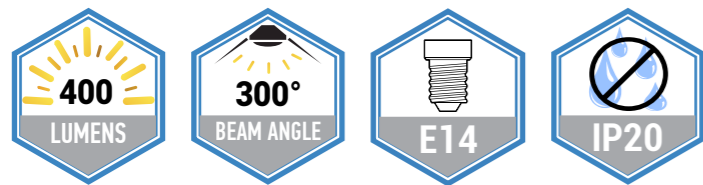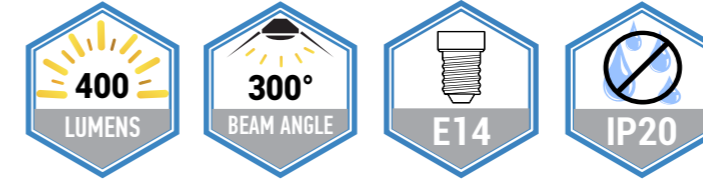

4W FILAMENT
LED BULB G45 E14



Model No.	SP1477	SP1478	SP1479
P Watts	4W	4W	4W
V Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
F Flux	400 lm	400 lm	400 lm
B Beam Angle	300°	300°	300°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ45x78 mm	φ45x78 mm	φ45x78 mm


EAN Code 6000K [3800156614772](#)
 EAN Code 4500K [3800156614789](#)
 EAN Code 2700K [3800156614796](#)

SP1477 White Light [6000K](#)
 SP1478 Neutral Light [4500K](#)
 SP1479 Warm Light [2700K](#)

4W FILAMENT
Dimmable
LED BULB C35 E14



SP1473 Warm Light [2700K](#)

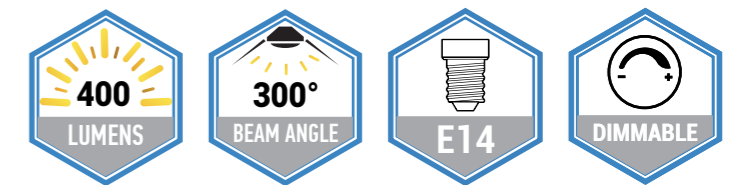

Model No.	SP1473
P Watts	4W
V Input Voltage	AC:175-265V
F Flux	400 lm
B Beam Angle	300°
L Light Color	WARM LIGHT
Ra CRI	>80
I IP Rating	IP20
L Life Span	25 000 h
D Dimension	φ35x98mm

EAN Code 2700K [3800156614734](#)

LED TUBES



T5 TUBE MAT



<p>4W 31CM SIZE</p> <p>320 LUMENS</p> <p>TU5653 White Light 6000K TU5645 Neutral Light 4500K TU5655 Warm Light 2700K</p>	<p>8W 57CM SIZE</p> <p>640 LUMENS</p> <p>TU5653 White Light 6000K TU5645 Neutral Light 4500K TU5655 Warm Light 2700K</p>	<p>12W 87CM SIZE</p> <p>960 LUMENS</p> <p>TU5653 White Light 6000K TU5645 Neutral Light 4500K TU5655 Warm Light 2700K</p>	<p>16W 117CM SIZE</p> <p>1280 LUMENS</p> <p>TU5651 White Light 6000K TU5648 Neutral Light 4500K TU5658 Warm Light 2700K</p>	<p>20W 145CM SIZE</p> <p>1600 LUMENS</p> <p>TU5650 White Light 6000K TU5649 Neutral Light 4500K TU5659 Warm Light 2700K</p>
---	---	--	--	--

	4W T5 TUBE 31 CM	8W T5 TUBE 57 CM	12W T5 TUBE 87 CM	16W T5 TUBE 117 CM	23W T5 TUBE 145 CM
Model No.	TU5653/TU5645/TU5655	TU5654/TU5646/TU5656	TU5652/TU5647/TU5657	TU5651/TU5648/TU5658	TU5650/TU5649/TU5659
Watts	4W	8W	12W	16W	20W
Input Voltage	AC:220V	AC:220V	AC:220V	AC:220V	AC:220V
Flux	320 lm	640 lm	960 lm	1280 lm	1600 lm
Beam Angle	200°	200°	200°	200°	200°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	28x310 mm 	28x570 mm 	28x870 mm 	28x1170 mm 	28x1450 mm
EAN Code 6000K	3800156656536	3800156656543	3800156656529	3800156656512	3800156656505
EAN Code 4500K	3800156656451	3800156656468	3800156656475	3800156656482	3800156656499
EAN Code 2700K	3800156656550	3800156656567	3800156656574	3800156656581	3800156656598



T8 TUBE
PROFESSION EDITION
ONE SIDE POWER

200°
BEAM ANGLE

SAVE 80%
ENERGY

IP20



9W

810 LUMENS

60CM SIZE

- TU5611-M White Light 6000K
- TU5613-M Neutral Light 4500K
- TU5612-M Warm Light 2700K

18W

1610 LUMENS

120CM SIZE

- TU5623-M White Light 6000K
- TU5625-M Neutral Light 4500K
- TU5624-M Warm Light 2700K

22W

1980 LUMENS

150CM SIZE

- TU5641-M White Light 6000K
- TU5642-M Neutral Light 4500K
- TU5643-M Warm Light 2700K

	9W T8 TUBE 60 CM	18W T8 TUBE 120 CM	22W T8 TUBE 150 CM
Model No.	TU5611-M/TU5613-M/TU5612-M	TU5623-M/TU5625-M/TU5624-M	TU5641-M/TU5642-M/TU5643-M
Watts	9W	18W	22W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	810 lm	1610 lm	1980 lm
Beam Angle	200°	200°	200°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ28x600 mm 	φ28x1200 mm 	φ28x1500 mm
EAN Code 6000K	3800156656116	3800156656239	3800156656413
EAN Code 4500K	3800156656130	3800156656253	3800156656420
EAN Code 2700K	3800156656123	3800156656246	3800156656437

	9W T8 TUBE 60 CM	18W T8 TUBE 120 CM	23W T8 TUBE 150 CM
Model No.	TU5670/TU5671/TU5672	TU5673/TU5674/TU5675	TU5666/TU5667/TU5668
Watts	9W	18W	23W
Input Voltage	AC170-265V	AC:170-265V	AC:170-265V
Flux	720 lm	1440 lm	2000 lm
Beam Angle	200°	200°	300°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ28x600 mm 	φ28x1200 mm 	φ28x1500 mm
EAN Code 6000K	3800156656703	3800156656734	3800156656666
EAN Code 4500K	3800156656710	3800156656741	3800156656673
EAN Code 2700K	3800156656727	3800156656758	3800156656680



200°
BEAM ANGLE

SAVE 80%
ENERGY

IP20



T8 TUBE
GLASS - ONE SIDE POWER

9W

810 LUMENS

60CM SIZE

- TU5670 White Light 6000K
- TU5671 Neutral Light 4500K
- TU5672 Warm Light 2700K

18W

1440 LUMENS

120CM SIZE

- TU5673 White Light 6000K
- TU5674 Neutral Light 4500K
- TU5675 Warm Light 2700K

23W

2000 LUMENS

150CM SIZE

- TU5666 White Light 6000K
- TU5667 Neutral Light 4500K
- TU5668 Warm Light 2700K



T8 TUBE GLASS
PROFESSION EDITION



9W
900 LUMENS
60CM SIZE

18W
1800 LUMENS
120CM SIZE

23W
2300 LUMENS
150CM SIZE

- TU5691 White Light 6000K
- TU5692 Neutral Light 4500K
- TU5693 Warm Light 2700K

- TU5694 White Light 6000K
- TU5695 Neutral Light 4500K
- TU5696 Warm Light 2700K

- TU5697 White Light 6000K
- TU5698 Neutral Light 4500K
- TU5699 Warm Light 2700K

	9W T8 TUBE 60 CM	18W T8 TUBE 120 CM	23W T8 TUBE 150 CM
Model No.	TU5691/TU5692/TU5693	TU5694/TU5695/TU5696	TU5697/TU5698/TU5699
Watts	9W	18W	23W
Input Voltage	AC:220V	AC:220V	AC:220V
Flux	900 lm	1800 lm	2300 lm
Beam Angle	200°	200°	200°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ28x600 mm	φ28x1200 mm	φ28x1500 mm
EAN Code 6000K	3800156656918	3800156656949	3800156656970
EAN Code 4500K	3800156656925	3800156656956	3800156656987
EAN Code 2700K	3800156656932	3800156656963	3800156656994



T8 TUBE FIXTURE
SINGLE T8 TUBE SOCKET
FOR ONE-SIDE POWER

SINGLE TUBE 9W

OT6650
60CM SIZE

SINGLE TUBE 18W

OT6652
120CM SIZE

SINGLE TUBE 23W

OT6654
150CM SIZE



T8 TUBE FIXTURE
DOUBLE T8 TUBE SOCKET
FOR ONE-SIDE POWER

DOUBLE TUBE 9W

OT6651
60CM SIZE

DOUBLE TUBE 18W

OT6653
120CM SIZE

DOUBLE TUBE 23W

OT6655
150CM SIZE


LED DOWNLIGHTS OUTER INSTALLATION

Model No.	CB2261	CB2265	CB2262
Watts	12W	12W	12W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	960 lm	960 lm	960 lm
Beam Angle	60°	60°	60°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ118x50 mm	φ118x50 mm	φ118x50 mm

EAN Code 6000K [3800156622616](#)
 EAN Code 4500K [3800156622654](#)
 EAN Code 2700K [3800156622623](#)




12W COB SURFACE
DOWNLIGHT ROUND

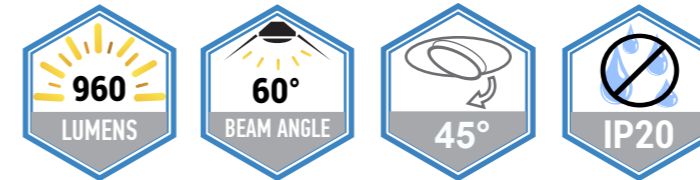

CB2261 White Light [6000K](#)
 CB2265 Neutral Light [4500K](#)
 CB2262 Warm Light [2700K](#)




12W COB SURFACE
DOWNLIGHT SQUARE

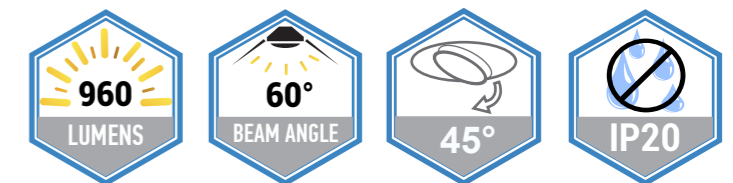

Model No.	CB2263	CB2266	CB2264
Watts	12W	12W	12W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	960 lm	960 lm	960 lm
Beam Angle	60°	60°	60°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	118x118x50mm	118x118x50mm	118x118x50mm

CB2263 White Light [6000K](#)
 CB2266 Neutral Light [4500K](#)
 CB2264 Warm Light [2700K](#)

EAN Code 6000K [3800156622630](#)
 EAN Code 4500K [3800156622661](#)
 EAN Code 2700K [3800156622647](#)

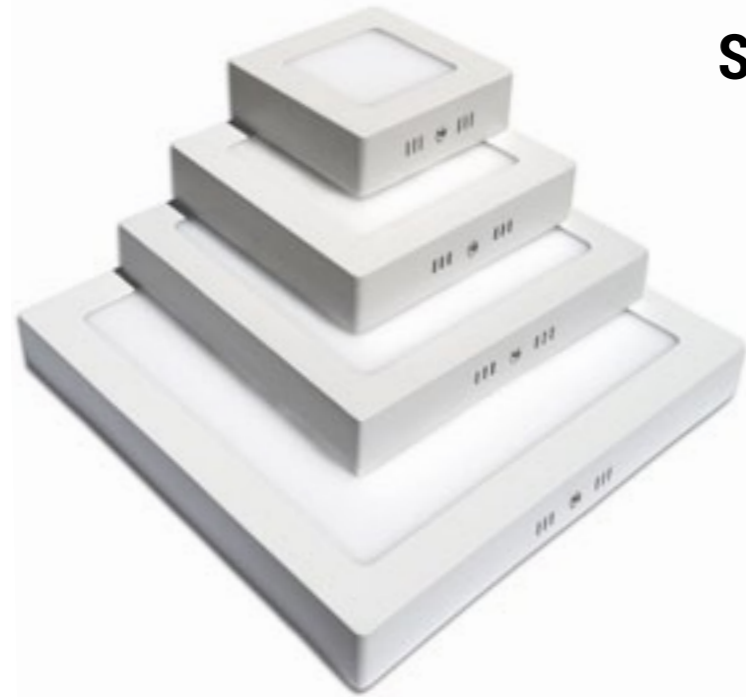

SURFACE PANEL SQUARE OUTER INSTALLATION



7W



DL2237 White Light 6000K
DL2251 Neutral Light 4500K
DL2238 Warm Light 2700K

12W



DL2252 White Light 6000K
DL2253 Neutral Light 4500K
DL2254 Warm Light 2700K

18W



DL2241 White Light 6000K
DL2255 Neutral Light 4500K
DL2242 Warm Light 2700K

24W



DL2256 White Light 6000K
DL2257 Neutral Light 4500K
DL2258 Warm Light 2700K

	7W SURFACE PANEL	12W SURFACE PANEL	18W SURFACE PANEL	24W SURFACE PANEL
Model No.	DL2237/DL2251/DL2238	DL2252/DL2253/DL2254	DL2241/DL2255/DL2242	DL2256/DL2257/DL2258
Watts	7W	12W	18W	24W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	560 lm	960 lm	1440 lm	1920 lm
Beam Angle	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	120x120x35 mm	167x167x35 mm	220x220x35 mm	295x295x35 mm
EAN Code 6000K	3800156622371	3800156622524	3800156622418	3800156622562
EAN Code 4500K	3800156622517	3800156622531	3800156622555	3800156622579
EAN Code 2700K	3800156622388	3800156622548	3800156622425	3800156622586

SURFACE PANEL ROUND OUTER INSTALLATION



7W



DL2231 White Light 6000K
DL2243 Neutral Light 4500K
DL2232 Warm Light 2700K

12W



DL2244 White Light 6000K
DL2245 Neutral Light 4500K
DL2246 Warm Light 2700K

18W



DL2235 White Light 6000K
DL2247 Neutral Light 4500K
DL2236 Warm Light 2700K

24W



DL2248 White Light 6000K
DL2249 Neutral Light 4500K
DL2250 Warm Light 2700K

	7W SURFACE PANEL	12W SURFACE PANEL	18W SURFACE PANEL	24W SURFACE PANEL
Model No.	DL2231/DL2243/DL2232	DL2244/DL2245/DL2246	DL2235/DL2247/DL2236	DL2248/DL2249/DL2250
Watts	9W	12W	18W	24W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	560 lm	960 lm	1440lm	1920 lm
Beam Angle	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ120x38 mm	φ172x38 mm	φ225x38 mm	φ300x38 mm
EAN Code 6000K	3800156622319	3800156622449	3800156622357	3800156622487
EAN Code 4500K	3800156622432	3800156622456	3800156622470	3800156622494
EAN Code 2700K	3800156622326	3800156622463	3800156622364	3800156622500

LED MINI PANEL

ROUND MODULE



3W



DL2431 White Light 6000K
DL2432 Neutral Light 4500K
DL2433 Warm Light 2700K

6W



DL2434 White Light 6000K
DL2435 Neutral Light 4500K
DL2436 Warm Light 2700K

12W



DL2437 White Light 6000K
DL2438 Neutral Light 4500K
DL2439 Warm Light 2700K

18W



DL2335 White Light 6000K
DL2440 Neutral Light 2700K
DL2336 Warm Light

25W



DL2441 White Light 6000K
DL2442 Neutral Light 4500K
DL2443 Warm Light 2700K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	25W MINI PANEL
Model No.	DL2431/DL2432/DL2433	DL2434/DL2435/DL2436	DL2437/DL2438/DL2439	DL2335/DL2440/DL2336	DL2441/DL2442/DL2443
Watts	3W	6W	12W	18W	25W
Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V
Flux	195 lm	390 lm	780 lm	1170 lm	1625 lm
Beam Angle	150°	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ85x25 mm	φ120x25 mm	φ170x25 mm	φ225x25 mm	299x25 mm
EAN Code 6000K	3800156624313	3800156624344	3800156624375	3800156623354	3800156624412
EAN Code 4500K	3800156624320	3800156624351	3800156624382	3800156624405	3800156624429
EAN Code 2700K	3800156624337	3800156624368	3800156624399	3800156623361	3800156624436

LED MINI PANEL

SQUARE MODULE



3W



DL2444 White Light 6000K
DL2445 Neutral Light 4500K
DL2446 Warm Light 2700K

6W



DL2447 White Light 6000K
DL2448 Neutral Light 4500K
DL2449 Warm Light 2700K

12W



DL2450 White Light 6000K
DL2451 Neutral Light 4500K
DL2452 Warm Light 2700K

18W



DL2348 White Light 6000K
DL2453 Neutral Light 4500K
DL2349 Warm Light 2700K

25W




DL2454 White Light 6000K
DL2455 Neutral Light 4500K
DL2456 Warm Light 2700K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	25W MINI PANEL
Model No.	DL2444/DL2445/DL2446	DL2447/DL2448/DL2449	DL2450/DL2451/DL2452	DL2348/DL2453/DL2349	DL2454/DL2455/DL2456
Watts	3W	6W	12W	18W	25W
Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-240V
Flux	195 lm	390 lm	780 lm	1170 lm	1625 lm
Beam Angle	150°	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	87x87x22 mm	122x122x22 mm	170x170x22 mm	225x225x25 mm	295x295x25 mm
EAN Code 6000K	3800156624443	3800156624474	3800156624504	3800156623484	3800156624542
EAN Code 4500K	3800156624450	3800156624481	3800156624511	3800156624535	3800156624559
EAN Code 2700K	3800156624467	3800156624498	3800156624528	3800156623491	3800156624566



NEW


Model No.	DL2385	SP2386	SP2387
P Watts	16W	16W	16W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
☀ Flux	1280 lm	1280 lm	1280 lm
◡ Beam Angle	120°	120°	120°
☀ Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
💧 IP Rating	IP20	IP20	IP20
🕒 Life Span	25 000 h	25 000 h	25 000 h
L Dimension	295x295x9 mm	295x295x9 mm	295x295x9 mm




EAN Code 6000K [3800156623859](#)
 EAN Code 4500K [3800156623866](#)
 EAN Code 2700K [3800156623873](#)

16W
LED PANEL WITH DRIVER

DL2385 White Light [6000K](#)
 DL2386 Neutral Light [4500K](#)
 DL2387 Warm Light [2700K](#)

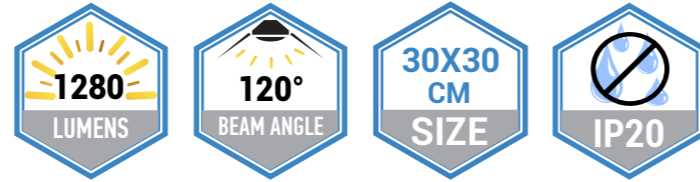


Model No.	DL2350	DL2363	DL2351
P Watts	36W	36W	36W
V Input Voltage	AC: 200-240V	AC:200-240V	AC:200-240V
☀ Flux	2880 lm	2880 lm	2880 lm
◡ Beam Angle	120°	120°	120°
☀ Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
💧 IP Rating	IP20	IP20	IP20
🕒 Life Span	25 000 h	25 000 h	25 000 h
L Dimension	595x595x9 mm	595x595x9 mm	595x595x9 mm



EAN Code 6000K [3800156623507](#)
 EAN Code 4500K [3800156623637](#)
 EAN Code 2700K [3800156623514](#)

36W
LED PANEL WITH DRIVER

DL2350 White Light [6000K](#)
 DL2363 Neutral Light [4500K](#)
 DL2351 Warm Light [2700K](#)

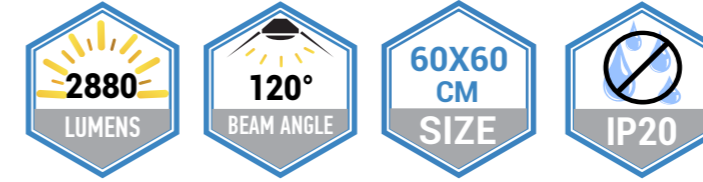

24W
LED PANEL WITH DRIVER

Model No.	DL2388	DL2389	DL2390
P Watts	24W	24W	24W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
☀ Flux	1920 lm	1920 lm	1920 lm
◡ Beam Angle	120°	120°	120°
☀ Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
💧 IP Rating	IP20	IP20	IP20
🕒 Life Span	25 000 h	25 000 h	25 000 h
L Dimension	295x595x9 mm	295x595x9 mm	295x595x9 mm




EAN Code 6000K [3800156623880](#)
 EAN Code 4500K [3800156623897](#)
 EAN Code 2700K [3800156623903](#)

DL2388 White Light [6000K](#)
 DL2389 Neutral Light [4500K](#)
 DL2390 Warm Light [2700K](#)



NEW

48W
LED PANEL WITH DRIVER

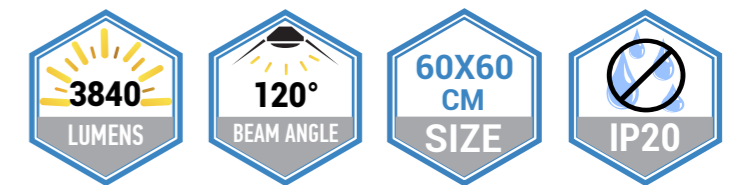

Model No.	DL2367	DL2368
P Watts	48W	48W
V Input Voltage	AC:200-240V	AC:200-240V
☀ Flux	3840 lm	3840 lm
◡ Beam Angle	120°	120°
☀ Light Color	WHITE LIGHT	NEUTRAL LIGHT
Ra CRI	>80	>80
💧 IP Rating	IP20	IP20
🕒 Life Span	25 000 h	25 000 h
L Dimension	595x595x9 mm	595x595x9 mm




DL2367 White Light [6000K](#)
 DL2368 Neutral Light [4500K](#)

EAN Code 6000K [3800156623675](#)
 EAN Code 4500K [3800156623682](#)



Model No.	DL2711	SP2712	SP2713
Watts	48W	48W	48W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
Flux	3840 lm	3840 lm	3840 lm
Beam Angle	120°	120°	120°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	595x595x9 mm	595x595x9 mm	595x595x9 mm



EAN Code 6000K [3800156627116](#)
 EAN Code 4500K [3800156627123](#)
 EAN Code 2700K [3800156627130](#)


48W TÜV
LED PANEL WITH DRIVER

DL2711 White Light [6000K](#)
 DL2712 Neutral Light [4500K](#)
 DL2713 Warm Light [2700K](#)



48W TÜV
LED PANEL WITH DRIVER

Model No.	DL2714	DL2715	DL2716
Watts	48W	48W	48W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	3840 lm	3840 lm	3840 lm
Beam Angle	120°	120°	120°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	1195x295x9 mm	1195x295x9 mm	1195x295x9 mm





EAN Code 6000K [3800156627147](#)
 EAN Code 4500K [3800156627154](#)
 EAN Code 2700K [3800156627161](#)

DL2714 White Light [6000K](#)
 DL2715 Neutral Light [4500K](#)
 DL2716 Warm Light [2700K](#)



LED PANEL FRAME

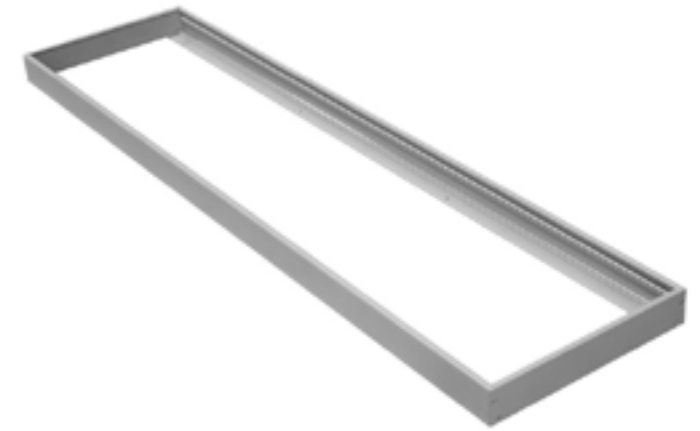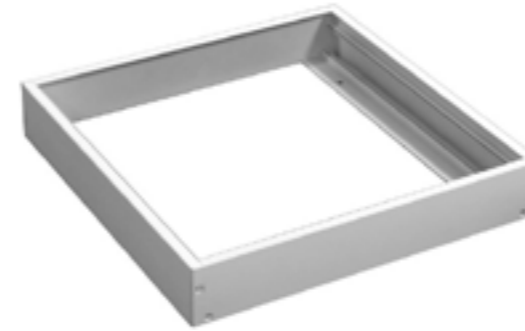

OT5195
Dimension [300x300mm](#)

OT5198
Dimension [600x600mm](#)

OT5196
Dimension [600x300mm](#)

OT5197
Dimension [1200x300mm](#)



ACCESSORIES FOR HANGING



OT5182
Stainless steel cable



Clips for LED Panel

OT5188



LED DOWNLIGHTS COB





Model No.	CB3230	CB3231	CB3232
Watts	30W	30W	30W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	2400 lm	2400 lm	2400 lm
Beam Angle	90°	90°	90°
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	235x146x140 mm	235x146x140 mm	235x146x140 mm

30W COB DOWNLIGHT RECTANGULAR , WHITE BODY

EAN Code 6000K [3800156632301](#)
 EAN Code 4500K [3800156632325](#)
 EAN Code 2700K [3800156632318](#)

CB3230 White Light 6000K
 CB3232 Neutral Light 4500K
 CB3231 Warm Light 2700K

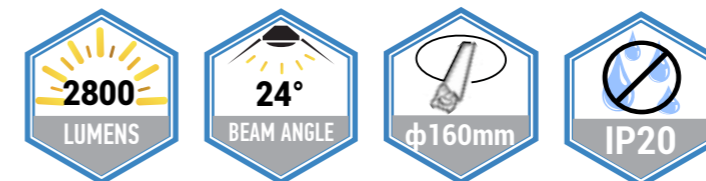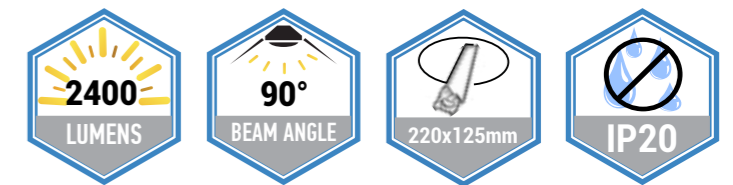

35W COB DOWNLIGHT ROUND , WHITE BODY

Model No.	CB3237	CB3238	CB3239
Watts	35W	35W	35W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	1920 lm	1920 lm	1920 lm
Beam Angle	24°	24°	24°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ180xH160 mm	φ180xH160 mm	φ180xH160 mm



EAN Code 6000K [3800156632370](#)
 EAN Code 4500K [3800156632387](#)
 EAN Code 2700K [3800156632394](#)

CB3237 White Light 6000K
 CB3238 Neutral Light 4500K
 CB3239 Warm Light 2700K



WHITE BODY

Model No.	CB3226	CB3247	CB3227
P Watts	5W	5W	5W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	400 lm	400 lm	400 lm
BA Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
LS Life Span	30 000 h	30 000 h	30 000 h
D Dimension	φ85×40 mm	φ85×40 mm	φ85×40 mm

EAN Code 6000K [3800156632264](#)
 EAN Code 4500K [3800156632479](#)
 EAN Code 2700K [3800156632271](#)

5W COB DOWNLIGHT
ROUND, ROTATABLE

CB3226 White Light [6000K](#)
 CB3247 Neutral Light [4500K](#)
 CB3227 Warm Light [2700K](#)





WHITE BODY

Model No.	CB3201	CB3206	CB3202
P Watts	8W	8W	8W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	640 lm	640 lm	640 lm
BA Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
LS Life Span	30 000 h	30 000 h	30 000 h
D Dimension	φ95×55 mm	φ95×55 mm	φ95×55 mm

EAN Code 6000K [3800156632011](#)
 EAN Code 4500K [3800156632066](#)
 EAN Code 2700K [3800156632028](#)

8W COB DOWNLIGHT
ROUND, ROTATABLE

CB3201 White Light [6000K](#)
 CB3206 Neutral Light [4500K](#)
 CB3202 Warm Light [2700K](#)

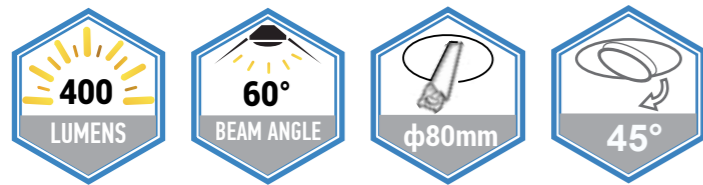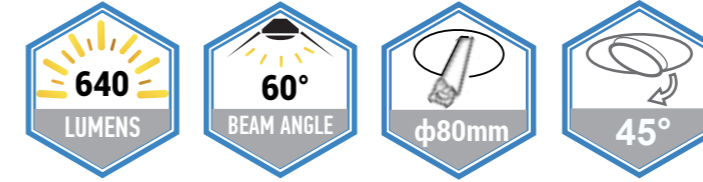

5W COB DOWNLIGHT
ROUND, ROTATABLE

Model No.	CB3228	CB3248	CB3229
P Watts	5W	5W	5W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	400 lm	400 lm	400 lm
BA Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
LS Life Span	30 000 h	30 000 h	30 000 h
D Dimension	φ85×40 mm	φ85×40 mm	φ85×40 mm

EAN Code 6000K [3800156632288](#)
 EAN Code 4500K [3800156632486](#)
 EAN Code 2700K [3800156632295](#)




ALU BODY

CB3228 White Light [6000K](#)
 CB3248 Neutral Light [4500K](#)
 CB3229 Warm Light [2700K](#)

8W COB DOWNLIGHT
ROUND, ROTATABLE



INOX BODY

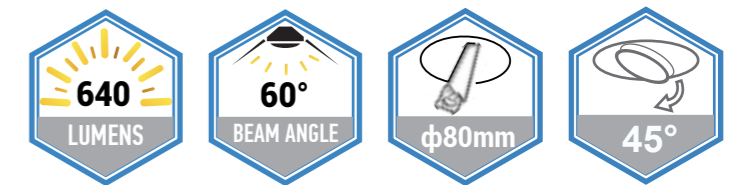

Model No.	CB3203	CB3205	CB3204
P Watts	8W	8W	8W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	640 lm	640 lm	640 lm
BA Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
LS Life Span	30 000 h	30 000 h	30 000 h
D Dimension	φ95×55 mm	φ95×55 mm	φ95×55 mm


CB3203 White Light [6000K](#)
 CB3205 Neutral Light [4500K](#)
 CB3204 Warm Light [2700K](#)

EAN Code 6000K [3800156632035](#)
 EAN Code 4500K [3800156632059](#)
 EAN Code 2700K [3800156632042](#)



WHITE BODY



Model No.	CB3207	CB3222	CB3212
Watts	8W	8W	8W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	640 lm	640 lm	640 lm
Beam Angle	60°	60°	60°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	30 000 h	30 000 h	30 000 h
Dimension	100x100x70 mm	100x100x70 mm	100x100x70 mm



EAN Code 6000K [3800156632073](#)
 EAN Code 4500K [3800156632226](#)
 EAN Code 2700K [3800156632127](#)

8W COB DOWNLIGHT
SQUARE, ROTATABLE

CB3207 White Light [6000K](#)
 CB3212 Neutral Light [4500K](#)
 CB3222 Warm Light [2700K](#)

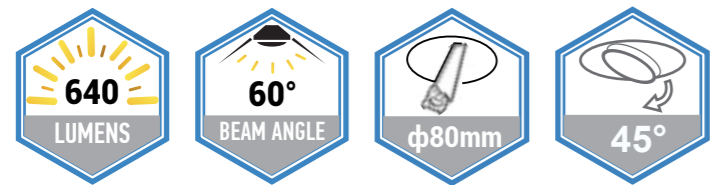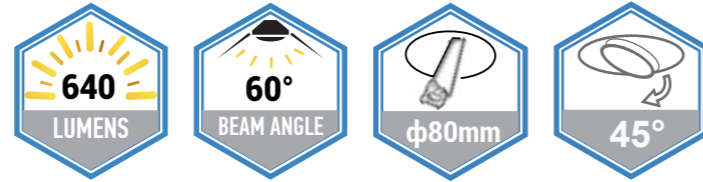

8W COB DOWNLIGHT
SQUARE, ROTATABLE

INOX BODY



Model No.	CB3223	CB3224	CB3225
Watts	8W	8W	8W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	640 lm	640 lm	640 lm
Beam Angle	60°	60°	60°
Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	30 000 h	30 000 h	30 000 h
Dimension	100x100x70 mm	100x100x70 mm	100x100x70 mm




EAN Code 6000K [3800156632233](#)
 EAN Code 4500K [3800156632240](#)
 EAN Code 2700K [3800156632257](#)

CB3223 White Light [6000K](#)
 CB3224 Neutral Light [4500K](#)
 CB3225 Warm Light [2700K](#)



COB DOWNLIGHT
SQUARE

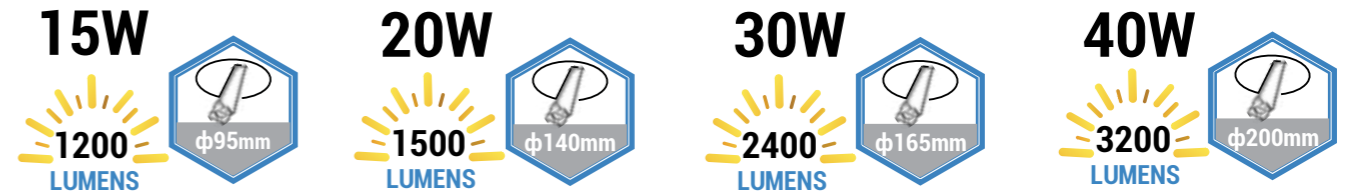

ROTATABLE
 CB3233 Neutral Light [4500K](#) CB3234 Neutral Light [4500K](#) CB3235 Neutral Light [4500K](#) CB3236 Neutral Light [4500K](#)

	15W COB DOWNLIGHT	20W COB DOWNLIGHT	30W COB DOWNLIGHT	40W COB DOWNLIGHT
--	-------------------	-------------------	-------------------	-------------------

Model No.	CB3233	CB3234	CB3235	CB3236
Watts	15W	20W	30W	40W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	1200 lm	1500 lm	2400 lm	3200 lm
Beam Angle	60°	72°	90°	110°
Light Color	NEUTRAL LIGHT	NEUTRAL LIGHT	NEUTRAL LIGHT	NEUTRAL LIGHT
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	30 000 h	30 000 h	30 000 h	30 000 h
Dimension	115x115x90 mm	160x160x105 mm	195x195x110 mm	230x230x120 mm



EAN Code 4500K [3800156632332](#) [3800156632349](#) [3800156632356](#) [3800156632363](#)




Model No.	CB3251	CB3252	CB3253
P Watts	12W	12W	12W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	960 lm	960 lm	960 lm
B Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	25 000 h	25 000 h	25 000 h
D Dimension	φ115x42mm	φ115x42mm	φ115x42mm

12W COB DOWNLIGHT

ROUND, ADJUSTABLE

EAN Code 6000K [3800156632516](#)
 EAN Code 4500K [3800156632523](#)
 EAN Code 2700K [3800156632530](#)

CB3251 White Light [6000K](#)
 CB3252 Neutral Light [4500K](#)
 CB3253 Warm Light [2700K](#)

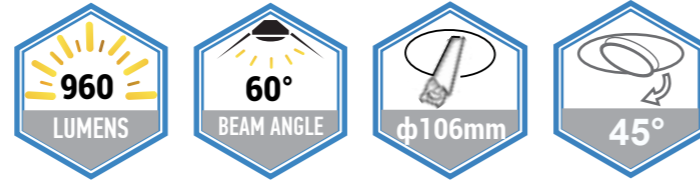


Model No.	CB3241	CB3242
P Watts	25W	25W
V Input Voltage	AC:200-240V	AC:200-240V
F Flux	2200 lm	2200 lm
B Beam Angle	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT
Ra CRI	>80	>80
I IP Rating	IP20	IP20
L Life Span	25 000 h	25 000 h
D Dimension	φ182x102mm	φ182x102mm

EAN Code 6000K [3800156632417](#)
 EAN Code 4500K [3800156632424](#)




25W COB DOWNLIGHT

ROUND, ADJUSTABLE

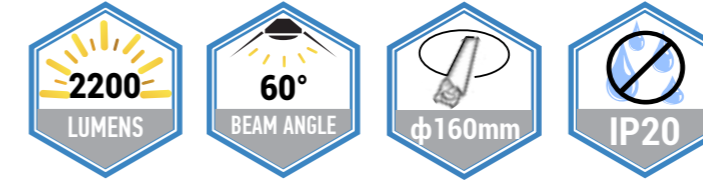

CB3241 White Light [6000K](#)
 CB3242 Neutral Light [4500K](#)

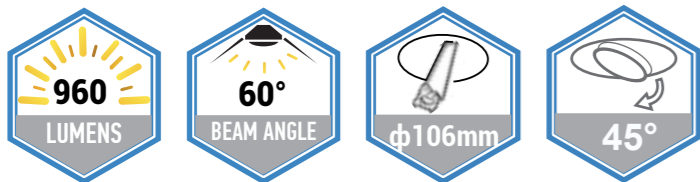

12W COB DOWNLIGHT

SQUARE, ADJUSTABLE

Model No.	CB3254	CB3255	CB3256
P Watts	12W	12W	12W
V Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
F Flux	960 lm	960 lm	960 lm
B Beam Angle	60°	60°	60°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT	WARM LIGHT
Ra CRI	>80	>80	>80
I IP Rating	IP20	IP20	IP20
L Life Span	30 000 h	30 000 h	30 000 h
D Dimension	115x115x42mm	115x115x42mm	115x115x42mm



EAN Code 6000K [3800156632547](#)
 EAN Code 4500K [3800156632554](#)
 EAN Code 2700K [3800156632561](#)


CB3254 White Light [6000K](#)
 CB3255 Neutral Light [4500K](#)
 CB3256 Warm Light [2700K](#)

35W COB DOWNLIGHT

ROUND, ADJUSTABLE



CB3243 White Light [6000K](#)
 CB3244 Neutral Light [4500K](#)

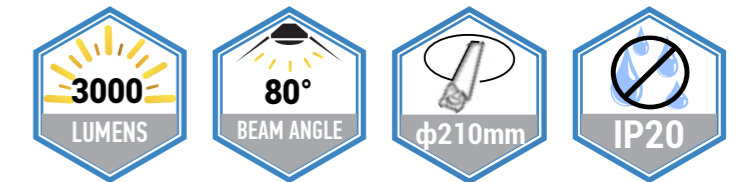

Model No.	CB3243	CB3244
P Watts	2W	2W
V Input Voltage	AC:200-240V	AC:200-240V
F Flux	3000 lm	3000 lm
B Beam Angle	80°	80°
L Light Color	WHITE LIGHT	NEUTRAL LIGHT
Ra CRI	>80	>80
I IP Rating	IP20	IP20
L Life Span	30 000 h	30 000 h
D Dimension	φ231x125mm	φ231x125mm

EAN Code 6000K [3800156632431](#)
 EAN Code 4500K [3800156632448](#)

COB DOWNLIGHT
ROUND , WHITE BODY



10W 800 LUMENS φ105mm	15W 1200 LUMENS φ135mm	20W 1600 LUMENS φ165mm	30W 2400 LUMENS φ200mm
------------------------------------	-------------------------------------	-------------------------------------	-------------------------------------

- | | | | |
|----------------------------|----------------------------|----------------------------|----------------------------|
| CB3193 White Light 6000K | CB3161 White Light 6000K | CB3163 White Light 6000K | CB3165 White Light 6000K |
| CB3176 Neutral Light 4500K | CB3170 Neutral Light 4500K | CB3160 Neutral Light 4500K | CB3180 Neutral Light 4500K |
| CB3156 Warm Light 2700K | CB3162 Warm Light 2700K | CB3164 Warm Light 2700K | CB3166 Warm Light 2700K |

	10W COB DOWNLIGHT	15W COB DOWNLIGHT	20W COB DOWNLIGHT	30W COB DOWNLIGHT
Model No.	CB3193/CB3176/CB3156	CB3161/CB3170/CB3162	CB3163/CB3160/CB3164	CB3165/CB3180/CB3166
Watts	10W	15W	30W	30W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	800 lm	1200 lm	1600 lm	2400 lm
Beam Angle	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	30 000 h	30 000 h	30 000 h	30 000 h
Dimension	φ124x40 mm	φ164x40 mm	φ187x55 mm	φ227x67 mm
EAN Code 6000K	3800156631939	3800156631618	3800156631632	3800156631656
EAN Code 4500K	3800156631762	3800156631700	3800156631601	3800156631809
EAN Code 2700K	3800156631564	3800156631625	3800156631649	3800156631663

COB DOWNLIGHT
ROUND , INOX BODY



10W 800 LUMENS φ105mm	15W 1200 LUMENS φ135mm	20W 1600 LUMENS φ165mm	30W 2400 LUMENS φ200mm
------------------------------------	-------------------------------------	-------------------------------------	-------------------------------------

- | | | | |
|----------------------------|----------------------------|----------------------------|----------------------------|
| CB3167 White Light 6000K | CB3169 White Light 6000K | CB3172 White Light 6000K | CB3173 White Light 6000K |
| CB3178 Neutral Light 4500K | CB3154 Neutral Light 4500K | CB3179 Neutral Light 4500K | CB3175 Neutral Light 4500K |
| CB3168 Warm Light 2700K | CB3153 Warm Light 2700K | CB3192 Warm Light 2700K | CB3174 Warm Light 2700K |

	10W COB DOWNLIGHT	15W COB DOWNLIGHT	20W COB DOWNLIGHT	30W COB DOWNLIGHT
Model No.	CB3167/CB3178/CB3168	CB3169/CB3154/CB3153	CB3172/CB3179/CB3192	CB3173/CB3175/CB3174
Watts	10W	15W	20W	30W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	800 lm	1200 lm	1600 lm	2400 lm
Beam Angle	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	30 000 h	30 000 h	30 000 h	30 000 h
Dimension	φ124x40 mm	φ164x40 mm	φ187x55 mm	φ227x67 mm
EAN Code 6000K	3800156631670	3800156631694	3800156631724	3800156631731
EAN Code 4500K	3800156631786	3800156631540	3800156631793	3800156631755
EAN Code 2700K	3800156631687	3800156631533	3800156631922	3800156631748

LED STRIPS AND ACCESSORIES



LED STRIP RGB 5050-NON-WATERPROOF



Model No.	ST4301	ST4302
Type LED	5050	5050
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	7.2W/m	14.4W/m
Light Color	RGB	RGB
Beam Angle	120°	120°
IP Rating	IP20	IP20
LEDs/m	30/m	60/m
Dimension	5000x10x2 mm	5000x10x2 mm



LED STRIP RGB 5050-WATERPROOF



Model No.	ST4303	ST4304
Type LED	5050	5050
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	7.2W/m	14.4W/m
Light Color	RGB	RGB
Beam Angle	120°	120°
IP Rating	IP54	IP54
LEDs/m	30/m	60/m
Dimension	5000x10x2.5mm	5000x10x2.5 mm



LED STRIP

3528-NON WATERPROOF
60 SMD/m

Model No.	ST4102	ST4103	ST4100	ST4104	ST4105	ST4106
Type LED	3528	3528	3528	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT	RED LIGHT	GREEN LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°	120°	120°
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
LEDs/m	60/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm

LED STRIP

3528-WATERPROOF
60 SMD/m

Model No.	ST4131	ST4132	ST4133	ST4134	ST4135	ST4136
Type LED	3528	3528	3528	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m
Light Color	NEUTRAL LIGHT	WHITE LIGHT	WARM LIGHT	RED LIGHT	GREEN LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°	120°	120°
IP Rating	IP54	IP54	IP54	IP54	IP54	IP54
LEDs/m	60/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x8x2.5mm	5000x8x2.5mm	5000x8x2.5mm	5000x8x2.5mm	5000x8x2.5mm	5000x8x2.5mm

LED STRIP
3528-NON WATERPROOF
120 SMD/m

Model No.	ST4110	ST4111	ST4140
Type LED	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W
Power of meter	9.6W/m	9.6W/m	9.6W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT
Beam Angle	120°	120°	120°
IP Rating	IP20	IP20	IP20
LEDs/m	120/m	120/m	120/m
Dimension	10000x8x2 mm	10000x8x2 mm	10000x8x2 mm

LED STRIP

3528-WATERPROOF
120 SMD/m

Model No.	ST4120	ST4121	ST4141
Type LED	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W
Power of meter	9.6W/m	9.6W/m	9.6W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT
Beam Angle	120°	120°	120°
IP Rating	IP54	IP54	IP54
LEDs/m	120/m	120/m	120/m
Dimension	5000x8x2.5mm	5000x8x2.5mm	5000x8x2.5mm

LED STRIP

5050-NON WATERPROOF
30 SMD/m



Model No.	ST4201	ST4202
Type LED	5050	5050
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	7.2W/m	7.2W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP20	IP20
LEDs/m	30/m	30/m
Dimension	5000x10x2 mm	5000x8x2 mm

LED STRIP

5050-WATERPROOF
60 SMD/m



Model No.	ST4239	ST4240	ST4241	ST4217	ST4218	ST4219
Type LED	5050	5050	5050	5050	5050	5050
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT	BLUE LIGHT	GREEN LIGHT	RED LIGHT
Beam Angle	120°	120°	120°	120°	120°	120°
IP Rating	IP54	IP54	IP54	IP54	IP54	IP54
LEDs/m	60/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x10x2.5mm	5000x10x2.5mm	5000x10x2.5mm	5000x10x2.5mm	5000x10x2.5mm	5000x10x2.5mm



LED STRIP
5050-NON WATERPROOF
60 SMD/m



Model No.	ST4207	ST4208	ST4227	ST4223	ST4224	ST4225
Type LED	5050	5050	5050	5050	5050	5050
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT	RED LIGHT	GREEN LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°	120°	120°
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
LEDs/m	60/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x10x2mm	5000x10x2mm	5000x10x2mm	5000x10x2mm	5000x10x2mm	5000x10x2mm

LED STRIP
5050-WATERPROOF
30 SMD/m



Model No.	ST4209	ST4210
Type LED	5050	5050
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	7.2W/m	7.2W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP54	IP54
LEDs/m	30/m	30/m
Dimension	5000x10x2.5 mm	5000x10x2.5 mm



LED STRIP

Professional Edition
3528-NON WATERPROOF
60 SMD/m



Model No.	ST4702	ST4703	ST4704	ST4705	ST4706
Type LED	3528	3528	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m
Light Color	WHITE LIGHT	WARM LIGHT	RED LIGHT	GREEN LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°	120°
IP Rating	IP20	IP20	IP20	IP20	IP20
LEDs/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm	5000x8x2 mm

LED STRIP

Professional Edition
3528-WATERPROOF
60 SMD/m



Model No.	ST4732	ST4733	ST4734	ST4735	ST4736
Type LED	3528	3528	3528	3528	3528
Voltage	DC:12V	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	4.8W/m	4.8W/m	4.8W/m	4.8W/m	4.8W/m
Light Color	WHITE LIGHT	WARM LIGHT	RED LIGHT	GREEN LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°	120°
IP Rating	IP54	IP54	IP54	IP54	IP54
LEDs/m	60/m	60/m	60/m	60/m	60/m
Dimension	5000x8x2.5 mm	5000x8x2.5 mm	5000x8x2.5 mm	5000x8x2.5 mm	5000x8x2.5 mm



LED STRIP
Professional Edition
3528-NON WATERPROOF
120 SMD/m



Model No.	ST4710	ST4711
Type LED	3528	3528
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	9.6W/m	9.6W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP20	IP20
LEDs/m	120/m	120/m
Dimension	5000x8x2 mm	5000x8x2 mm

LED STRIP
Professional Edition
3528-WATERPROOF
120 SMD/m



Model No.	ST4720	ST4721
Type LED	3528	3528
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	9.6W/m	9.6W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP54	IP54
LEDs/m	120/m	120/m
Dimension	5000x8x2.5 mm	5000x8x2.5 mm





LED STRIP

Professional Edition
5050-NON WATERPROOF
60 SMD/m



Model No.	ST4807	ST4808	ST4823	ST4825
Type LED	5050	5050	5050	5050
Voltage	DC:12V	DC:12V	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W	50lm/W	50lm/W
Power of meter	14.4W/m	14.4W/m	14.4W/m	14.4W/m
Light Color	WHITE LIGHT	WARM LIGHT	RED LIGHT	BLUE LIGHT
Beam Angle	120°	120°	120°	120°
IP Rating	IP20	IP20	IP20	IP20
LEDs/m	60/m	60/m	60/m	60/m
Dimension	5000x10x2 mm	5000x10x2 mm	5000x10x2 mm	5000x10x2 mm

LED STRIP

Professional Edition
3014-NON WATERPROOF
120 SMD/m



Model No.	ST4901	ST4902	ST4903
Type LED	3014	3014	3014
Voltage	DC:12V	DC:12V	DC:12V
Flux per watt	70lm/W	70lm/W	70lm/W
Power of meter	12W/m	12W/m	12W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT
Beam Angle	120°	120°	120°
IP Rating	IP20	IP20	IP20
LEDs/m	120/m	120/m	120/m
Dimension	5000x8x1.5 mm	5000x8x1.5 mm	5000x8x1.5 mm

LED STRIP

Professional Edition
5050-WATERPROOF
60 SMD/m



Model No.	ST4839	ST4840
Type LED	5050	5050
Voltage	DC:12V	DC:12V
Flux per watt	50lm/W	50lm/W
Power of meter	14.4W/m	14.4W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP54	IP54
LEDs/m	60/m	60/m
Dimension	5000x10x2.5 mm	5000x10x2.5 mm

LED STRIP

Professional Edition
5630-NON WATERPROOF
60 SMD/m



Model No.	ST4911	ST4912	ST4913
Type LED	5630	5630	5630
Voltage	DC:12V	DC:12V	DC:12V
Flux per watt	70lm/W	70lm/W	70lm/W
Power of meter	12W/m	12W/m	12W/m
Light Color	WHITE LIGHT	WARM LIGHT	NEUTRAL LIGHT
Beam Angle	120°	120°	120°
IP Rating	IP20	IP20	IP20
LEDs/m	60/m	60/m	60/m
Dimension	5000x10x2mm	5000x10x2mm	5000x10x2mm

LED STRIP RGB

Professional Edition
5050-NON-WATERPROOF



Model No.	ST4311	ST4312	ST4313	ST4314
Type LED	5050	5050	5050	5050
Voltage	12V	12V	12V	12V
Flux per watt	70lm/W	70lm/W	70lm/W	70lm/W
Power of meter	7.2W/m	14.4W/m	14.4W/m	14.4W/m
Light Color	RGB	RGB	RGB-White	RGB-Warm White
Beam Angle	120°	120°	120°	120°
IP Rating	IP20	IP20	IP20	IP20
LEDs/m	30/m	60/m	60/m	60/m
Dimension	5000x10x2 mm	5000x10x2 mm	5000x12x2 mm	5000x12x2 mm

LED STRIP RGB

Professional Edition
5050-WATERPROOF



Model No.	ST4315	ST4316
Type LED	5050	5050
Voltage	12V	12V
Flux per watt	70lm/W	70lm/W
Power of meter	7.2W/m	14.4W/m
Light Color	RGB	RGB
Beam Angle	120°	120°
IP Rating	IP65	IP65
LEDs/m	30/m	60/m
Dimension	5000x10x2 mm	5000x10x2 mm



LED STRIP 24V

Professional Edition
5050-NON WATERPROOF
60 SMD/m



Model No.	ST4851	ST4852
Type LED	5050	5050
Voltage	DC:24V	DC:24V
Flux per watt	70lm/W	70lm/W
Power of meter	14.4W/m	14.4W/m
Light Color	WHITE LIGHT	WARM LIGHT
Beam Angle	120°	120°
IP Rating	IP20	IP20
LEDs/m	60/m	60/m
Dimension	5000x12x2 mm	5000x12x2 mm

ACCESSORIES



Model No.	Description
OT5151	CONNECTOR FOR LED STRIP 3528
OT5152	CONNECTOR FOR LED STRIP 5050
AC6608	CONNECTOR FOR LED STRIP RGB
AC6619	ANGLE CONNECTOR FOR LED STRIP 3528 8mm
AC6620	ANGLE CONNECTOR FOR LED STRIP 5050 10mm
AC6621	ANGLE CONNECTOR FOR LED STRIP RGB 10mm
AC6610	CONNECTOR FOR LED STRIP DC MALE
AC6611	CONNECTOR FOR LED STRIP DC FEMALE
AC6612	FLEXIBLE CONNECTOR FOR LED STRIP 3528 DC FEMALE
AC6613	FLEXIBLE CONNECTOR FOR LED STRIP 5050 DC FEMALE
AC6614	FLEXIBLE CONNECTOR FOR LED STRIP RGB
AC6615	FLEXIBLE CONNECTOR FOR LED STRIP 3528
AC6616	FLEXIBLE CONNECTOR FOR LED STRIP 5050
AC6618	FLEXIBLE CONNECTOR FOR LED STRIP RGB+WH
AC6617	FLEXIBLE CONNECTOR FOR RGB LED STRIP WITH PIN




LED POWER SUPPLIES & CONTROLLERS

STRIP POWER SUPPLIES

METAL 24V Output


AC110-220V - Switchable



Model No.	Watts	Output Voltage	Current	IP Rating	Dimension
AC6151	100W	DC: 24V	4.2A	IP21	199x100x42mm
AC6152	250W	DC: 24V	10.5A	IP21	199x110x51mm
AC6153	360W	DC: 24V	15A	IP21	215x114x50mm

STRIP POWER SUPPLIES


WATERPROOF METAL 12V Output



Model No.	Watts	Output Voltage	Current	IP Rating	Dimension
AC6110	30W	DC:12V	2.5A	IP67	202x30x20mm
AC6111	60W	DC:12V	5A	IP67	233x40x23mm
AC6115	100W	DC:12V	8.5A	IP67	175x70x43 mm
AC6112	150W	DC:12V	12.5A	IP67	205x72x43 mm

STRIP POWER SUPPLIES


METAL 12V Output



Model No.	Watts	Output Voltage	Current	IP Rating	Dimension
AC6122	15W	DC: 12V	1.25A	IP21	85x50x34 mm
AC6104	24W	DC:12V	2A	IP21	85x50x34 mm
AC6121	36W	DC:12V	3A	IP21	115x47x33mm
AC6113	40W	DC:12V	3.3A	IP21	122x55x33mm
AC6116	50W	DC:12V	4.2A	IP21	120x60x40mm
AC6105	60W	DC:12V	5A	IP21	111x78x37mm
AC6109	100W	DC:12V	8.3A	IP21	160x100x42mm
AC6106	120W	DC:12V	10A	IP21	199x100x42mm
AC6114	150W	DC:12V	12.5A	IP21	198x99x42mm
AC6123	200W	DC:12V	16.5A	IP21	185x65x38mm
AC6117	250W	DC:12V	20A	IP21	260x102x65mm
AC6108	360W	DC:12V	30A	IP21	200x100x50mm
AC6124	500W	DC:12V	41A	IP21	320x80x60mm

STRIP POWER SUPPLIES

PLASTIC 12V Output



Model No.	Watts	Output Voltage	Current	IP Rating	Dimension
AC6120	18W	12V	1.5A	IP21	85x50x34mm
AC6101	24W	12V	2A	IP21	85x50x34mm
AC6102	36W	12V	3A	IP21	115x47x34mm
AC6103	60W	12V	5A	IP21	122x55x34mm
AC6119	80W	12V	6.5A	IP21	120x60x40mm

**DIMMER LED STRIP**

WITH REMOTE CONTROL 8A

Model No.	AC6302
Power	96W-192W
Working Voltage	12V-24V
IP Rating	IP21
Dimension	80x55x30 mm

**REMOTE CONTROL LED STRIP**

RGB - 16 BUTTONS 3x2A

Model No.	AC6303
Power	72W
Working Voltage	12V
IP Rating	IP20
Dimension	50x35x20mm

**WIFI CONTROLER**

RGB / SINGLE COLOR 3x4A

Model No.	AC6310	AC6311
Power	90-288W	90-288W
Working Voltage	7.5-24V	7.5-24V
IP Rating	IP20	IP20
Dimension	85x45x15mm	85x45x15mm

**AMPLIFIER FOR LED STRIP**

RGB+WHITE 4x6A

Model No.	AC6328
Power	288W-576W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	65x55x20 mm

**REMOTE CONTROL LED STRIP**

RGB - 4 BUTTONS 3x4A

Model No.	AC6304
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	105x65x20mm

**REMOTE CONTROL LED STRIP**

RGB - 44 BUTTONS

Model No.	AC6306	AC6307
Power	72W	144W
Working Voltage	12V	12V
IP Rating	IP20	IP20
Dimension	50x35x20mm	50x35x20mm

**AMPLIFIER FOR LED STRIP**

RGB - IRON SHELL 3x8A

Model No.	AC6326
Power	288W-576W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	80x70x30 mm

**AMPLIFIER FOR LED STRIP**

RGB 3x4A

Model No.	AC6305
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	80x55x20 mm



REMOTE CONTROL LED STRIP

RGB TOUCH MINI WHITE / BLACK 3X6A

Model No.	AC6114	AC6115
Power	144W-288W	144W-288W
Working Voltage	12V-24V	12V-24V
IP Rating	IP20	IP20
Dimension	95x50x30 mm	95x50x30 mm



REMOTE CONTROL LED STRIP

RGBW TOUCH 4x6A

Model No.	AC6329
Power	288W-576W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	80x45x15



SENSOR DIMMER

WALL MOUNTED 10A

Model No.	AC6318
Power	120W-240W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm



SENSOR DIMMER

WALL MOUNTED WHITE 10A

Model No.	AC6320
Power	120W-240W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm



MUSIC LED CONTROLER

WITH REMOTE CONTROL 3x4A

Model No.	AC6312
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	170x85x23mm



DMX512 DECODER

3x4A

Model No.	AC6308
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	160x60x42mm



SENSOR DIMMER

WALL MOUNTED WHITE 3x4A

Model No.	AC6319
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm



SENSOR DIMMER

WALL MOUNTED BLACK 3x4A

Model No.	AC6317
Power	144W-288W
Working Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm





Model No.	FL5120	FL5126
Watts	12W	12W
Input Voltage	AC:200-240V	AC:200-240V
Flux	960 lm	960 lm
Beam Angle	24°	24°
Light Color	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	30 000 h	30 000 h
Dimension	φ98x110-H170 mm	φ98x110-H170 mm

EAN Code 4500K [3800156651203](#)
EAN Code 2700K [3800156651265](#)

12W TRACK LIGHT

INTERIOR FLOODLIGHT

FL5120 Neutral Light [4500K](#)
FL5126 Warm Light [2700K](#)

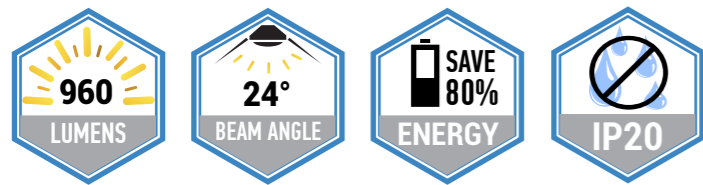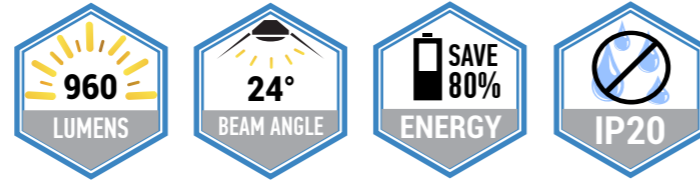

12W TRACK LIGHT

INTERIOR FLOODLIGHT

Model No.	FL5118	FL5117
Watts	12W	12W
Input Voltage	AC:200-240V	AC:200-240V
Flux	960 lm	960 lm
Beam Angle	24°	24°
Light Color	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	30 000 h	30 000 h
Dimension	φ98x110-H170 mm	φ98x110-H170 mm



EAN Code 4500K [3800156651180](#)
EAN Code 2700K [3800156651173](#)

FL5118 Neutral Light [4500K](#)
FL5117 Warm Light [2700K](#)

Model No.	FL5139	FL5119
Watts	25W	25W
Input Voltage	AC:200-240V	AC:200-240V
Flux	640 lm	640 lm
Beam Angle	60°	60°
Light Color	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	30 000 h	30 000 h
Dimension	φ98x195xH180 mm	φ98x195xH180 mm



EAN Code 4500K [3800156651395](#)
EAN Code 2700K [3800156651197](#)



25W TRACK LIGHT

INTERIOR FLOODLIGHT

FL5139 Neutral Light [4500K](#)
FL5119 Warm Light [2700K](#)

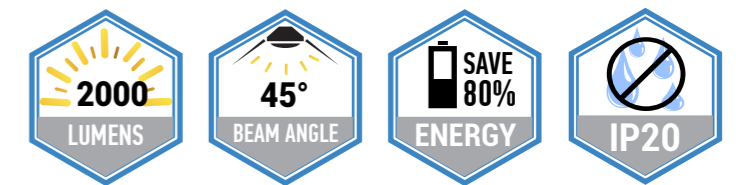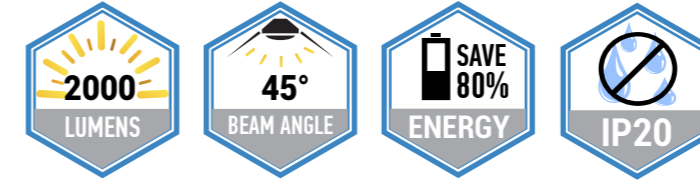

25W TRACK LIGHT

INTERIOR FLOODLIGHT



Model No.	FL5148	FL5147
Watts	25W	25W
Input Voltage	AC:200-240V	AC:200-240V
Flux	2000 lm	2000 lm
Beam Angle	60°	60°
Light Color	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	30 000 h	30 000 h
Dimension	φ98x195xH180 mm	φ98x195xH180 mm

CB3205 Neutral Light [4500K](#)
CB3204 Warm Light [2700K](#)

EAN Code 4500K [3800156651487](#)
EAN Code 2700K [3800156651470](#)





Model No.	FL5114
Watts	30W
Input Voltage	AC:200-240V
Flux	2400 lm
Beam Angle	24°
Light Color	NEUTRAL LIGHT
CRI	>80
IP Rating	IP20
Life Span	30 000 h
Dimension	φ94x150mm-H198mm

EAN Code 4500K 3800156651142

30W TRACK LIGHT INTERIOR FLOODLIGHT

FL5114 Neutral Light 4500K

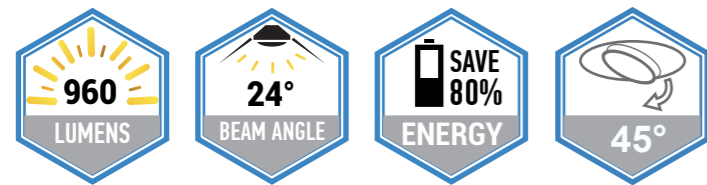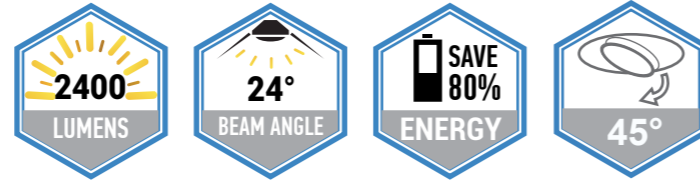

35W TRACK LIGHT INTERIOR FLOODLIGHT

Model No.	FL5115	FL5116
Watts	35W	35W
Input Voltage	AC:200-240V	AC:200-240V
Flux	960 lm	960 lm
Beam Angle	24°	24°
Light Color	NEUTRAL LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	30 000 h	30 000 h
Dimension	φ98x110-H170 mm	φ98x110-H170 mm



EAN Code 4500K 3800156651159
EAN Code 2700K 3800156651166

FL5115 Neutral Light 4500K
FL5116 Warm Light 2700K

ACCESSORIES

OT5157
Dimension 79x16mm



OT5160
Dimension 79x79x16mm



OT5158
Dimension 79x79x16mm



OT5159
Dimension 79x16mm

TRACK LINE 1m
OT5153
Body Color WHITE

TRACK LINE 2m
OT5156
Body Color WHITE

TRACK LINE 1m
OT5154
Body Color BLACK

TRACK LINE 2m
OT5155
Body Color BLACK





LED FLOODLIGHTS

LED SMD FLOODLIGHT GREEN LIGHT



10W
600 LUMENS




FL5426 Green Light GREEN

30W
1800 LUMENS

FL5427 Green Light GREEN

50W
3000 LUMENS

FL5428 Green Light GREEN

	10W SMD FLOODLIGHT	30W SMD FLOODLIGHT	50W SMD FLOODLIGHT
Model No.	FL5426	FL5427	FL5428
Watts	10W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	600 lm	1800 lm	3000lm
Beam Angle	150°	150°	150°
Light Color	Green	Green	Green
CRI	>80	>80	>80
IP Rating	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h
Dimension	111x83x38 mm 	223x184x51 mm 	233x284x62 mm 
EAN Code GREEN	3800156654266	3800156654273	3800156654280




LED SMD FLOODLIGHT
OUTER INSTALLATION



Power	LUMENS	Model No.	Light Color	Temp
10W	800	FL5431	White Light	6000K
		FL5432	Neutral Light	4500K
		FL5433	Warm Light	2700K
20W	1600	FL5434	White Light	6000K
		FL5435	Neutral Light	4500K
		FL5436	Warm Light	2700K
30W	2400	FL5437	White Light	6000K
		FL5438	Neutral Light	4500K
		FL5439	Warm Light	2700K
50W	4000	FL5440	White Light	6000K
		FL5441	Neutral Light	4500K
		FL5442	Warm Light	2700K

	10W SMD FLOODLIGHT	20W SMD FLOODLIGHT	30W SMD FLOODLIGHT	50W SMD FLOODLIGHT
Model No.	FL5431/FL5432/FL5433	FL5434/FL5435/FL5436	FL5437/FL5438/FL5439	FL5440/FL5441/FL5442
Watts	10W	20W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	800 lm	1600 lm	2400 lm	4000 lm
Beam Angle	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP66	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	111x83x38 mm	179x139x45 mm	223x184x51 mm	233x284x62 mm
EAN Code 6000K	3800156654310	3800156654341	3800156654372	3800156654402
EAN Code 4500K	3800156654327	3800156654358	3800156654389	3800156654419
EAN Code 2700K	3800156654334	3800156654365	3800156654396	3800156654426

LED SMD FLOODLIGHT
PIR SENSOR



Power	LUMENS	Model No.	Light Color	Temp
10W	800	FL5488	White Light	6000K
		FL5489	Neutral Light	4500K
		FL5490	Warm Light	2700K
20W	1600	FL5491	White Light	6000K
		FL5492	Neutral Light	4500K
		FL5493	Warm Light	2700K
30W	2400	FL5494	White Light	6000K
		FL5495	Neutral Light	4500K
		FL5496	Warm Light	2700K
50W	4000	FL5497	White Light	6000K
		FL5498	Neutral Light	4500K
		FL5499	Warm Light	2700K

	10W SMD FLOODLIGHT PIR SENSOR	20W SMD FLOODLIGHT PIR SENSOR	30W SMD FLOODLIGHT PIR SENSOR	50W SMD FLOODLIGHT PIR SENSOR
Model No.	FL5488/FL5489/FL5490	FL5491/FL5492/FL5493	FL5494/FL5495/FL5496	FL5497/FL5498/FL5499
Watts	10W	20W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	800 lm	1600 lm	2400lm	4000 lm
Beam Angle	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP66	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	111x83x38 mm	260x139x45 mm	300x184x51 mm	358x284x62 mm
EAN Code 6000K	3800156654884	3800156654914	3800156654945	3800156654976
EAN Code 4500K	3800156654891	3800156654921	3800156654952	3800156654983
EAN Code 2700K	3800156654907	3800156654938	3800156654969	3800156654990



LED SMD FLOODLIGHT
I-DESIGN



10W
900
LUMENS

- FL5450 White Light 6000K
- FL5451 Neutral Light 4500K
- FL5452 Warm Light 2700K

20W
1800
LUMENS

- FL5453 White Light 6000K
- FL5454 Neutral Light 4500K
- FL5455 Warm Light 2700K

30W
2700
LUMENS

- FL5456 White Light 6000K
- FL5457 Neutral Light 4500K
- FL5458 Warm Light 2700K

	10W SMD FLOODLIGHT I-Design	20W SMD FLOODLIGHT I-Design	30W SMD FLOODLIGHT I-Design
Model No.	FL5450/FL5451/FL5452	FL5453/FL5454/FL5455	FL5456/FL5457/FL5458
Watts	10W	20W	30W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	900 lm	1800 lm	2700 lm
Beam Angle	160°	160°	160°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h
Dimension	128x91x27 mm	183x133x30 mm	228x166x31 mm
EAN Code 6000K	3800156654501	3800156654532	3800156654563
EAN Code 4500K	3800156654518	3800156654549	3800156654570
EAN Code 2700K	3800156654525	3800156654556	3800156654587



LED SMD FLOODLIGHT
HIGH LINE DRIVERLESS



20W
1800
LUMENS

- FL5472 White Light 6000K
- FL5473 Warm Light 2700K

30W
2700
LUMENS

- FL5474 White Light 6000K
- FL5475 Warm Light 2700K

50W
4500
LUMENS

- FL5476 White Light 6000K
- FL5477 Warm Light 2700K

	10W SMD FLOODLIGHT High Line	20W SMD FLOODLIGHT High Line	30W SMD FLOODLIGHT High Line
Model No.	FL5472/FL5473	FL5474/FL5475	FL5476/FL5477
Watts	20W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	1800 lm	2700 lm	4500 lm
Beam Angle	120°	120°	120°
Light Color	WH/WW	WH/WW	WH/WW
CRI	>80	>80	>80
IP Rating	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h
Dimension	199x134x16 mm	239x169x17 mm	260x169x24 mm
EAN Code 6000K	3800156654723	3800156654747	3800156654761
EAN Code 2700K	3800156654730	3800156654754	3800156654778



LED SMD FLOODLIGHT
I-Design 2



10W	20W	30W	50W
900 LUMENS	1800 LUMENS	2700 LUMENS	4500 LUMENS
FL5726 White Light 6000K FL5727 Neutral Light 4500K FL5728 Warm Light 2700K	FL5729 White Light 6000K FL5730 Neutral Light 4500K FL5731 Warm Light 2700K	FL5732 White Light 6000K FL5733 Neutral Light 4500K FL5734 Warm Light 2700K	FL5735 White Light 6000K FL5736 Neutral Light 4500K FL5737 Warm Light 2700K

	10W SMD FLOODLIGHT	20W SMD FLOODLIGHT	30W SMD FLOODLIGHT	50W SMD FLOODLIGHT
Model No.	FL5726/FL5727/FL5728	FL5729/FL5730/FL5731	FL5732/FL5733/FL5734	FL5735/FL5736/FL5737
Watts	10W	20W	30W	50W
Input Voltage	AC: 85-265V	AC:170-265V	AC:170-265V	AC:170-265V
Flux	900 lm	1800 lm	2700 lm	4500 lm
Beam Angle	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	120x95x33 mm	170x127x35 mm	215x157x38 mm	252x190x43 mm
EAN Code 6000K	3800156657267	3800156657298	3800156657328	3800156657359
EAN Code 4500K	3800156657274	3800156657304	3800156657335	3800156657366
EAN Code 2700K	3800156657281	3800156657311	3800156657342	3800156657373

LED SMD FLOODLIGHT
I-Design 2, PIR SENSOR



10W	20W	30W	50W
900 LUMENS	1800 LUMENS	2700 LUMENS	4500 LUMENS
FL5738 White Light 6000K FL5739 Neutral Light 4500K FL5740 Warm Light 2700K	FL5741 White Light 6000K FL5742 Neutral Light 4500K FL5743 Warm Light 2700K	FL5744 White Light 6000K FL5745 Neutral Light 4500K FL5746 Warm Light 2700K	FL5747 White Light 6000K FL5748 Neutral Light 4500K FL5749 Warm Light 2700K

	10W SMD FLOODLIGHT I-Design ; Sensor	20W SMD FLOODLIGHT I-Design ; Sensor	30W SMD FLOODLIGHT I-Design ; Sensor	50W SMD FLOODLIGHT I-Design ; Sensor
Model No.	FL5738/FL5739/FL5740	FL5741/FL5742/FL5743	FL5744/FL5745/FL5746	FL5747/FL5748/FL5749
Watts	10W	20W	30W	50W
Input Voltage	AC:180-265V	AC:180-265V	AC:180-265V	AC:180-265V
Flux	900 lm	1800 lm	2700lm	4500 lm
Beam Angle	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	120x95x33 mm	170x127x35 mm	215x157x38 mm	252x190x43 mm
EAN Code 6000K	3800156657380	3800156657410	3800156657441	3800156657472
EAN Code 4500K	3800156657397	3800156657427	3800156657458	3800156657489
EAN Code 2700K	3800156657403	3800156657434	3800156657465	3800156657496



LED SMD FLOODLIGHT
PREMIUM REFLECTOR



50W
4500 LUMENS

FL5480 White Light 6000K
FL5481 Neutral Light 4500K

100W
9000 LUMENS

FL5483 White Light 6000K

120W
10800 LUMENS

FL5486 White Light 6000K

150W
13500 LUMENS

FL5487 White Light 6000K





50W SMD FLOODLIGHT PREMIUM

100W SMD FLOODLIGHT PREMIUM

120W SMD FLOODLIGHT PREMIUM

150W SMD FLOODLIGHT PREMIUM

Model No.	FL5480/FL5481	FL5483	FL5486	FL5487
Watts	50W	100W	120W	150W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	4500 lm	9000 lm	10800 lm	13500 lm
Beam Angle	100°	100°	120°	120°
Light Color	WH/NW	WH	WH	WH
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	278x254x105 mm	337x293x115 mm	380x333x122 mm	423x368x133 mm



EAN Code 6000K **3800156654808**
EAN Code 4500K **3800156654815**


3800156654839

3800156654860

3800156654877



LED SMD FLOODLIGHT
HIGH POWER

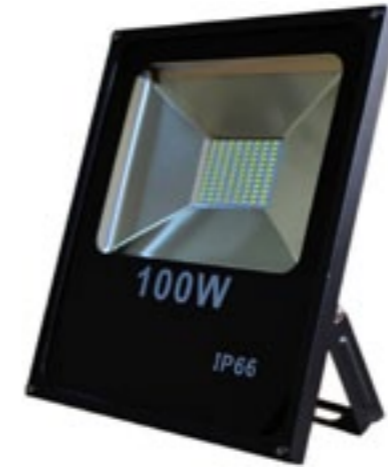

100W
8000 LUMENS

FL5443 White Light 6000K

150W
12000 LUMENS

FL5446 White Light 6000K

200W
16000 LUMENS

FL5449 White Light 6000K

300W
24000 LUMENS

FL5447 White Light 6000K

400W
32000 LUMENS

FL5448 White Light 6000K

100W SMD FLOODLIGHT




150W SMD FLOODLIGHT

200W SMD FLOODLIGHT

300W SMD FLOODLIGHT

300W SMD FLOODLIGHT

Model No.	FL5443	FL5446	FL5449	FL5447	FL5448
Watts	100W	150W	200W	300W	400W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	8 000 lm	12 000 lm	16 000 lm	24 000 lm	32 000 lm
Beam Angle	140°	120°	120°	140°	140°
Light Color	WH	WH	WH	WH	WH
CRI	>80	>80	>80	>80	>80
IP Rating	IP66	IP66	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	335x300x70 mm	385x300x160 mm	423x320x150 mm	600x324x190 mm	670x325x190 mm



EAN Code 6000K

3800156654433

3800156654464

3800156654495

3800156654471

3800156654488



LED SMD FLOODLIGHT I-Design 2



100W
8000 LUMENS

FL5751 White Light 6000K
FL5752 Neutral Light 4500K
FL5753 Warm Light 2700K

150W
12000 LUMENS

FL5754 White Light 6000K

200W
16000 LUMENS

FL5755 White Light 6000K

	100W SMD FLOODLIGHT I-Design 2	150W SMD FLOODLIGHT I-Design 2	200W SMD FLOODLIGHT I-Design 2
Model No.	FL5751/FL5752/FL5753	FL5754	FL5755
Watts	100W	150W	200W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	8 000 lm	12 000 lm	16 000 lm
Beam Angle	120°	120°	120°
Light Color	WH/NW/WW	WH	WH
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	334x258x55	380x280x66 mm	450x330x80 mm
EAN Code 6000K	3800156657519	3800156657540	3800156657557
EAN Code 4500K	3800156657526		
EAN Code 2700K	3800156657533		

LED SMD FLOODLIGHT NO DRIVER TECHNOLOGY



100W
9000 LUMENS

FL5270 Neutral Light 5700K

150W
13500 LUMENS

FL5268 Neutral Light 5700K

	100W SMD FLOODLIGHT I-Design 2	150W SMD FLOODLIGHT I-Design 2
Model No.	FL5270	FL5268
Watts	100W	150W
Input Voltage	AC:220-240V	AC:220-240V
Flux	9 000 lm	13 500 lm
Beam Angle	15°	15°
Light Color	NW	NW
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	35 000 h	35 000 h
Dimension	320x280x150 mm	487x280x160 mm
EAN Code 5700K	3800156652705	3800156652682



LED RGB FLOODLIGHT
WITH REMOTE CONTROL



FL5210 RGB Light RGB



FL5212 RGB Light RGB



FL5233 RGB Light RGB

	10W SMD FLOODLIGHT RGB	30W SMD FLOODLIGHT RGB	50W SMD FLOODLIGHT RGB
Model No.	FL5210	FL5212	FL5233
Watts	10W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	800 lm	2400 lm	4000 lm
Beam Angle	120°	120°	120°
Light Color	RGB	RGB	RGB
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	120x120x35 mm	167x167x35 mm	220x220x35 mm

EAN Code RGB 3800156652101

3800156652125

3800156652330



LED SMD FLOODLIGHT
RECHARGEABLE



FL5406 Neutral Light 4500K



CAR CHARGER INCLUDED




FL5407 Neutral Light 4500K

	10W SMD FLOODLIGHT RECHARGEABLE	20W SMD FLOODLIGHT RECHARGEABLE
Model No.	FL5406	FL5407
Watts	10W	20W
Input Voltage	AC:220-240V	AC:220-240V
Flux	800 lm	1600 lm
Beam Angle	120°	120°
Light Color	NW	NW
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	115x85x105 mm	180x140x120 mm

EAN Code 4500K

3800156654068

3800156654075

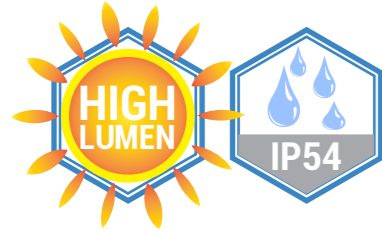

LED INDUSTRIAL LIGHT
HIGH BAY



30W



HB8122 White Light 6000K

55W



HB8123 White Light 6000K

100W



HB8124 White Light 6000K

150W



HB8125 White Light 6000K

	30W HIGH-BAY	55W HIGH-BAY	100W HIGH-BAY	150W HIGH-BAY
Model No.	HB8122	HB8123	HD8124	HB8125
Watts	30W	55W	100W	150W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	2400 lm	4400 lm	10 000 lm	15 000 lm
Beam Angle	90°	90°	60°	60°
Light Color	WH	WH	WH	WH
CRI	>80	>80	>80	>80
IP Rating	IP54	IP54	IP54	IP54
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ335mm-H262mm	φ435mm-H295mm	φ402mm-H349mm	φ410mm-H353mm

EAN Code 5700K 3800156681224 3800156681231 3800156681248 3800156681255

LED TUNNEL LIGHT



90W



SL9154 Neutral Light 5700K

120W



SL9152 Neutral Light 5700K

150W



SL9150 Neutral Light 5700K

180W



SL9153 Neutral Light 5700K

	90W TUNNEL LIGHT	120W TUNNEL LIGHT	150W TUNNEL LIGHT	180W TUNNEL LIGHT
Model No.	SL9154	SL9152	SL9150	SL9153
Watts	90W	120W	150W	180W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	7500 lm	10000 lm	12500 lm	15000 lm
Beam Angle	150°	150°	150°	150°
Light Color	Neutral Light	Neutral Light	Neutral Light	Neutral Light
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	35 000 h	35 000 h	35 000 h	35 000 h
Dimension	L319×W280×H155mm	L403×W280×H155mm	L671×W271×H188mm	L571×W280×H155mm

EAN Code 5700K 3800156691544 3800156691520 3800156691506 3800156691537

LED STREET LIGHTING



LED STREET LIGHT



12W



SL9120 White Light 6000K

24W



SL9122 White Light 6000K


50W



SL9150 White Light 6000K

	12W STREET LIGHT	24W STREET LIGHT	50W STREET LIGHT
Model No.	SL9120	SL9122	SL9150
Watts	12W	24W	50W
Input Voltage	AC:100-265V	AC:220-240V	AC:220-240V
Flux	960 lm	2000 lm	4000 lm
Beam Angle	120°	120°	120°
Light Color	WH	WH	WH
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	347x96x60mm	402mm-H349mm	520x220x70mm
EAN Code 5700K	3800156691209	3800156691223	3800156691506

LED STREET LIGHT

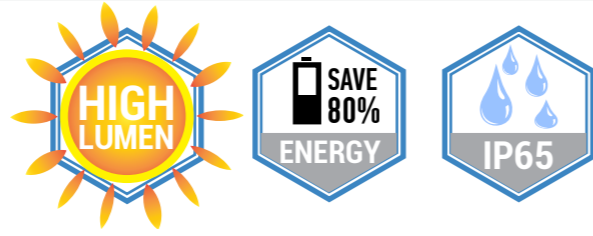

30W
3000 LUMENS

SL9141 Neutral Light 5700K

50W
5000 LUMENS

SL9161 Neutral Light 5700K

100W
10000 LUMENS

SL9162 Neutral Light 5700K

45W
4500 LUMENS

SL9142 Neutral Light 5700K


60W
6000 LUMENS

SL9134 Neutral Light 5700K

	30W STREET LIGHT	45W STREET LIGHT	50W STREET LIGHT	60W STREET LIGHT	100W STREET LIGHT
Model No.	SL9141	SL9142	SL9161	SL9143	SL9162
Watts	30W	45W	50W	60W	100W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	3000lm	4500 lm	5000 lm	6000 lm	10000 lm
Beam Angle	140°	140°	140°	140°	140°
Light Color	NW	NW	NW	NW	NW
CRI	>80	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65	IP65
Life Span	35 000 h	35 000 h	35 000 h	35 000 h	35 000 h
Dimension	396x108x92 mm	492x456x95 mm	396x108x92 mm	492x156x95 mm	492x156x99 mm

EAN Code 5700K 3800156691414 3800156691421 3800156691612 3800156691438 3800156691629

LED STREET LIGHT



90W
7500 LUMENS

SL9144 Neutral Light 5700K

150W
12500 LUMENS

SL9146 Neutral Light 5700K

120W
10800 LUMENS

SL9148 Neutral Light 5700K

120W
10000 LUMENS

SL9145 Neutral Light 5700K

180W
15000 LUMENS

SL9147 Neutral Light 5700K

	90W STREET LIGHT	120W STREET LIGHT	150W STREET LIGHT	180W STREET LIGHT	120W STREET LIGHT
Model No.	SL9144	SL9145	SL9146	SL9147	SL9148
Watts	90W	120W	150W	180W	120W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V	AC:200-240V	AC:200-240V
Flux	7500lm	10000 lm	12500 lm	15000 lm	10800 lm
Beam Angle	150°	150°	150°	150°	150°
Light Color	NW	NW	NW	NW	NW
CRI	>80	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65	IP65
Life Span	30 000 h	30 000 h	30 000 h	30 000 h	30 000 h
Dimension	319x280x155 mm	403x280x155 mm	487x280x155 mm	571x280x155 mm	560x271x156 mm

EAN Code 5700K 3800156691445 3800156691452 3800156691469 3800156691476 3800156691483



Model No.	WW7110	WW7111
Watts	9W	9W
Input Voltage	AC:180-265V	AC:180-265V
Flux	960 lm	960 lm
Beam Angle	15°	15°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	30 000 h	30 000 h
Dimension	495x58x50 mm	495x58x50 mm

9W WALL WASHER

9*1W EPISTAR CHIP

EAN Code 6000K [3800156671120](#)
EAN Code 2700K [3800156671119](#)

WW7110 White Light [6000K](#)
WW7111 Warm Light [2700K](#)



Model No.	WW7114	WW7115
Watts	36W	36W
Input Voltage	AC:180-265V	AC:180-265V
Flux	2880 lm	2880 lm
Beam Angle	15°	15°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	30 000 h	30 000 h
Dimension	998x58x50 mm	998x58x50 mm





36W WALL WASHER

36*1W EPISTAR CHIP

EAN Code 6000K [3800156671140](#)
EAN Code 2700K [3800156671157](#)

WW7114 White Light [6000K](#)
WW7115 Warm Light [2700K](#)

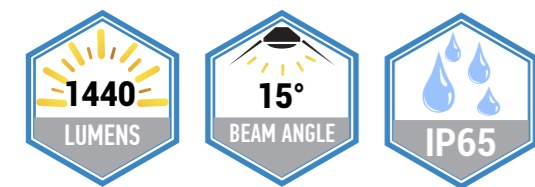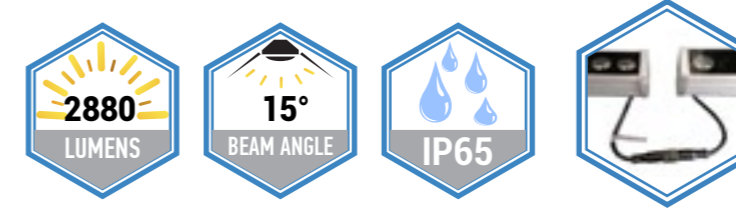

18W WALL WASHER

18*1W EPISTAR CHIP

Model No.	WW7112	WW7113
Watts	18W	18W
Input Voltage	AC:180-265V	AC:180-265V
Flux	1440 lm	1440 lm
Beam Angle	15°	15°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	30 000 h	30 000 h
Dimension	998x58x50 mm	998x58x50 mm




EAN Code 6000K [3800156671126](#)
EAN Code 2700K [3800156671133](#)

WW7112 White Light [6000K](#)
WW7113 Warm Light [2700K](#)



18W WALL WASHER

18*1W EPISTAR CHIP

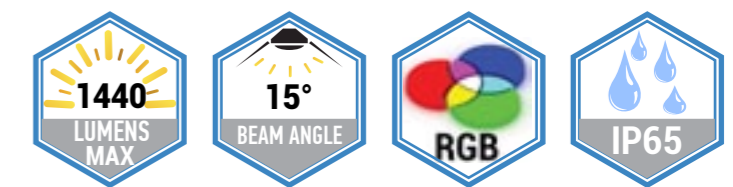

Model No.	WW7116
Watts	18W
Input Voltage	DC 24V
Flux	1440 lm
Beam Angle	15°
Light Color	RGB
CRI	>80
IP Rating	IP20
Life Span	30 000 h
Dimension	998x58x40 mm

WW7116 RGB Light [RGB](#)

EAN Code RGB [3800156671164](#)






Model No.	OT0507	OT0517
Watts	1W	1W
Input Voltage	AC:200-240V	AC:200-240V
Flux	80 lm	80 lm
Beam Angle	18°	18°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	φ65xH90 mm	φ65xH90 mm

1W OUTDOOR LIGHT BUILT-IN SPOTLIGHT

EAN Code 6000K [3800156605077](#)
EAN Code 2700K [3800156605176](#)

OT0507 White Light [6000K](#)
OT0517 Warm Light [2700K](#)

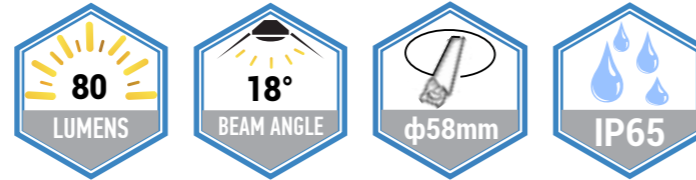


Model No.	OT0515	OT0516
Watts	5W	5W
Input Voltage	AC:200-240V	AC:200-240V
Flux	400 lm	400 lm
Beam Angle	18°	18°
Light Color	WHITE LIGHT	WARM LIGHT
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	φ148xH90 mm	φ148xH90 mm


EAN Code 6000K [3800156605152](#)
EAN Code 2700K [3800156605169](#)



5W OUTDOOR LIGHT BUILT-IN SPOTLIGHT

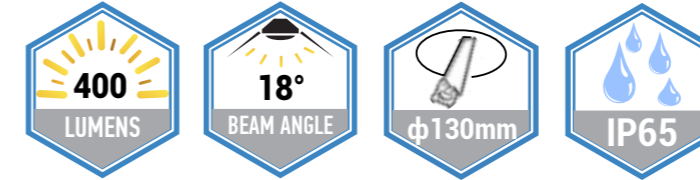

CB3241 White Light [6000K](#)
CB3242 Warm Light [2700K](#)

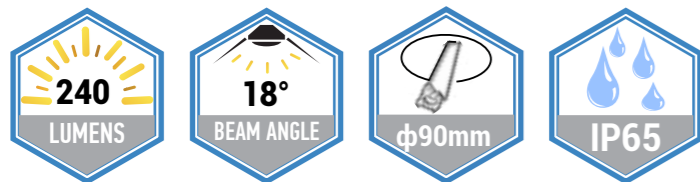

3W OUTDOOR LIGHT BUILT-IN SPOTLIGHT

Model No.	OT0501	OT0502	OT0503
Watts	3W	3W	3W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	240 lm	240 lm	240 lm
Beam Angle	18°	18°	18°
Light Color	WHITE LIGHT	WARM LIGHT	RGB
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ98xH80 mm	φ98xH80 mm	φ98xH80 mm




EAN Code 6000K [3800156605015](#)
EAN Code RGB [3800156605022](#)
EAN Code 2700K [3800156605039](#)



OT0501 White Light [6000K](#)
OT0502 Warm Light [2700K](#)
OT0503 RGB Light [RGB](#)

7W OUTDOOR LIGHT BUILT-IN SPOTLIGHT

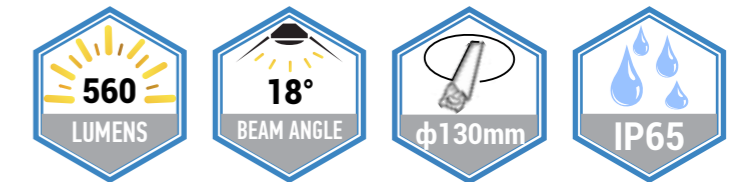

Model No.	OT0550
Watts	7W
Input Voltage	AC:200-240V
Flux	560 lm
Beam Angle	80°
Light Color	WHITE LIGHT
CRI	>80
IP Rating	IP65
Life Span	25 000 h
Dimension	φ148xH90 mm

OT0550 White Light [6000K](#)

EAN Code 6000K [3800156605503](#)




Evolution

The man discovered fire by nature, and this will have been the first major discovery, essential to the evolution of human life.

Without the light, any kind of activity would be much more complicated than we think, many were those who contributed their ideas to improve people's lives. History tells us that one of the greatest virtues of light, is to inspire the man to create inventions that mimic its purpose:

LIGHT !

Main advantages of LED technology

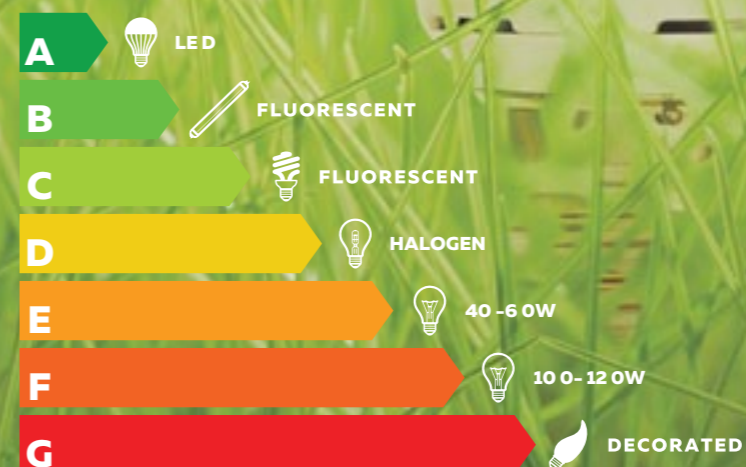

OPEN YOUR EYES

SAVE THE EARTH

Go! green





www.OPTONICALED.com

